

Beveling Base System

GRIND A
MITER EDGE
WITH
PRECISION







SURFACE PREPARATION FOR SEAMLESS COUNTERTOP INSTALLATIONS

SAME EDGE


POLISH STRAIGHT AND BEVEL EDGE TO A FACTORY FINISH



Alpha® Beveling System Overview

Beveling Auxiliary Base





Grind and Polish from 15 degree Hollywood Bevel to 45 degree Beveled Edge or Straight Edge

Model:	BAB1590 / BAB1590-M14
Beveling Angle:	15°~45°
Beveling Depth:	3/8" (10mm)
Max. Straight Angle:	90°
Max, Pad Size:	4" (100mm)
Spindle:	5/8"-11 / M14-2
Weight.	3.57 lbs (1.62 kgs)

PART NO.	TYPE
BAB1590	Beveling Auxiliary Base 5/8"-11
BAB1590-M14	Beveling Auxiliary Base M14-2



- Guide Rails are High-Quality Straight Edges Constructed of Sturdy Cast Aluminum
- · Perform Cuts That Are Straight and True, Time After Time
- · Works Great When Used with A Carriage Assembly





BAB-CASM Carriage Assembly for Beveling Base

PART NO.	SIZE	DESCRIPTION
ASC-GR04	4' (1.2m)	Guide Rail with 2 Clamps
ASC-GR07	7' (2.1m)	Guide Rail with 2 Clamps
ASC-GR12	12' (3.6m)	Guide Rail (2-6' pcs) with 2 Clamps, Connector & 4 Screws
ASC-GRKIT	Set	Guide Rail Bundle (3 Rails (4',7',12'), 6 Clamps, Connector & 4 Screws)
GR-AGCT	12" (0.3m)	Guide Rail Connector w/4 Screws (M8x20) for 12' Rails
BAB-CASM	BAB1590	Carriage Assembly for Beveling Base



Repositionable Waterproof Surface Protection Tape

- Can Be Used for Wet and Dry applications
- Applicable for All Stone Faces Including Marble and Limestone

Protects Surfaces from Scratches, Stains and

Etching

 Easily Mark Tape with Ball Point Pen, Permanent Marker, China Marker, etc.

PART NO.	COLOR	SIZE	RECOMMENDED FOR
BAB0650	Black	6" x 164'	Large Surface Protection



Turboshine Grinding, Polishing and Scratch Removal Systems





Turboshine Grinding Tools

3" Rigid Grinding Wheel

- Grind Mitered Edge with Precision
- Grind Hollywood Bevel with Ease
- Recommended for all Hard Surfaces

PART NO.	MAX. RPM	THREADS	GRIT	COLOR
TSM30060M / TSM306014	14,500	5/8"-11 / M14-2	60	Blue
TSM30120M / TSM312014	14,500	5/8"-11 / M14-2	120	Yellow

Turboshine Polishing Tools

Polishing Wheel For Natural and Engineered Stone










Dual Adapter


- Designed for Polishing Seamless Countertops and Scratch Removal for Natural and Engineered Stones
- Utilizes Dual Adapter System for Reduced Vibration
- Comes in 3" Rigid Discs

PART NO.	MAX. RPM	THREADS	GRIT	COLOR
TSR30100R	4,000	Dual Adapter System	100	Blue
TSR30200R	4,000	Dual Adapter System	200	Yellow
TSR30500R	4,000	Dual Adapter System	500	Red
TSR31000R	4,000	Dual Adapter System	1000	Dark Green
TSR32000R	4,000	Dual Adapter System	2000	Light Green
TSR33000R	4,000	Dual Adapter System	3000	Brown
TSR3BLACK	4,000	Dual Adapter System	Buff	Black
TSR3WHITE	4,000	Dual Adapter System	Buff	White
DAS35/8PD	6,000	5/8"-11	А	dapter
DAS3M14PD	6,000	M14-2	A	dapter

Turboshine Polishing Wheel For Crystallized Glass and Sintered Slab



- Utilizes Dual Adapter System for Reduced Vibration
- Comes in 3" Rigid Discs

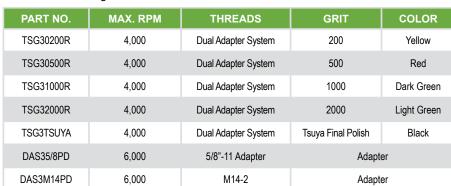



Dual Adapter







Groove Cutter

Wet Groove Cutting Wheel for Joint Seaming



- Create Strongest Joint Seam
- · Consistent Performance with Ease of Operation



PART NO.	THICKNESS	MAX RPM	THREADS	RECOMMENDED FOR	FOR USE ON
GCW258 / GCW214	4.2mm	14,500	5/8"-11 / M14-2	3/4" Slab	Granite/Quartz
GCW358 / GCW314	7.5mm	14,500	5/8"-11 / M14-2	1-1/4" Slab	Granite/Quartz
MCW258 / MCW214	4.6mm	14,500	5/8"-11 / M14-2	3/4" Slab	Marble/Sintered Slabs
PFBNG01			Nylon	Guide	

ELECTRIC POLISHER

VSP-320/VSP-340 Variable Speed Electric Wet Polisher



Model

Polishing Disc Size

Model:

Weight:

Air Inlet:

Spindle:

Water Inlet:

Air Pressure:

Air Consumption:

No Load Speed:

- · Heavy-Duty Gear System with Step-Down Transmission
- EasyOn-EasyOff Sleeve Improves Maneuverability
- Center Water-Feed System
- Ventilation Cap Diverts Water from Getting Into Motor Housing



MOUCI.	VOI -020/VOI -040
Rating:	120V/230V
Amperage:	7.0A/3.5A
Power:	800W
No Load Speed (Variable):	700~2500 RPM
Weight:	7.3 lbs (3.3 kgs)
Spindle:	5/8"-11/M14-2
Power Supply:	Single-phase AC, 50/60l
Plug Type:	A (120V) C(230V)
Cord:	15ft (4.5m)

VSP-320/VSP-340

4" (100mm)

PART NO.	DESCRIPTION	THREADS
VSP-320	Variable Speed Wet Polisher (120V)	5/8"-11
VSP-340	Variable Speed Wet Polisher (230V)	M14-2

Equipment included

Ground Fault Circuit Interrupter*, Flexible Hose w/ Garden Hose Adapter*, Wrench, C-Handle w/ Mounting Screws*, Side Handle (reversible), Extra Carbon Brush Set, Ventilation Cap w/Rubber Band*, Splash Guard w/Clamp, EasyOn-EasyOff Sleeve*
*Factory Attached

PNEUMATIC POLISHER

AIR-680/AIR-684 Pneumatic Polisher



AIR-680/AIR-684

15 CFM/ 420 I/min

2.64 lbs/1.2 kgs

85 PSI/6 Bars

4,000 RPM

1/4" BSPP

1/8" BSPP

5/8"-11/M14-2

- High-Performance, Pneumatic Polishing Tool with A Central Water-Feed System
- 15ft. All-Weather Hoses with Flexibility Down To -40F (or +140F)
- · Oil Port for Easy Lubrication

Ηz


- Lightweight and Ergonomically Designed
- Consumes 15 CFM (420l/min) and Requires 85 PSI (6 Bars)

PART NO.	DESCRIPTION	THREADS	
AIR-680	Pneumatic Polisher	5/8"-11	
AIR-684	Pneumatic Polisher	M14-2	
AIR-008	Rust Inhibitor Oil 8oz (237ml)		



E

Air Hose (15ft / 4.5m), Water Hose (15ft / 4.5m), Side Handle (reversible), Double End Wrench (19mm / 22mm), Rust Inhibitor Oil (8oz / 237ml) (AIR-008) Screw (w/ O-Ring Seal for Oil Port), Exhaust Hose with Clamp





103 Bauer Drive • Oakland, NJ 07436 800-648-7229 • Fax: 800-286-0114