

SPIKE DISC

Coating Removal


Made Easy




- ▶ Designed for Thick Coating Removal of Epoxy, Urethane, Glue and Adhesives
- ▶ Unique Open-Mesh Layout Reduces Clogging and Heat Build-Up
- ▶ Optimized Diamond Grits Provide A Consistent Performance
- ▶ Sandwiched-Rubber Cushioned Light-Weight Body Reduces Noise and Vibration



- ▶ Each Diamond Bead Has Multiple Diamond Grits To Maintain A Sharp Cutting Capability for A Long Time
- ▶ Can Be Used On Wood, Glass Fiber Reinforced Polymer and Carbon Fiber Reinforced Polymer.
- ▶ Available in 4-1/2", 5" and 7" with 7/8" Arbor or with 5/8"-11 Zinc Hub and A Square Arbor for Spring Load Systems
- ▶ Combine with The Ecoguard G for A Virtually Dust-Free Solution

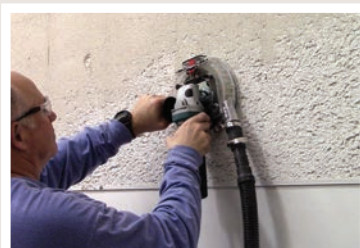

sandwich construction

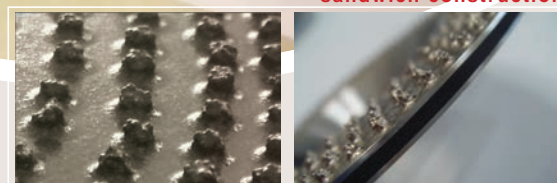

close-up of diamonds

PART NO.	SIZE	MAXIMUM RPM	ARBOR(S)	GRIT
VCS4535	4-1/2"	13,200	7/8"	35
VCS453H	4-1/2"	13,200	5/8"-11	35
VCS4550	4-1/2"	13,200	7/8"	50
VCS455H	4-1/2"	13,200	5/8"-11	50
VCS5035	5"	13,200	7/8"	35
VCS503H	5"	12,200	5/8"-11	35
VCS503Q	5"	12,200	Sq Arbor	35
VCS5050	5"	12,200	7/8"	50
VCS505H	5"	12,200	5/8"-11	50
VCS7035	7"	8,400	7/8"	35
VCS703H	7"	8,400	5/8"-11	35
VCS7050	7"	8,400	7/8"	50
VCS705H	7"	8,400	5/8"-11	50