




# G-Tape

## High Adhesion Acrylic Flashing Tape

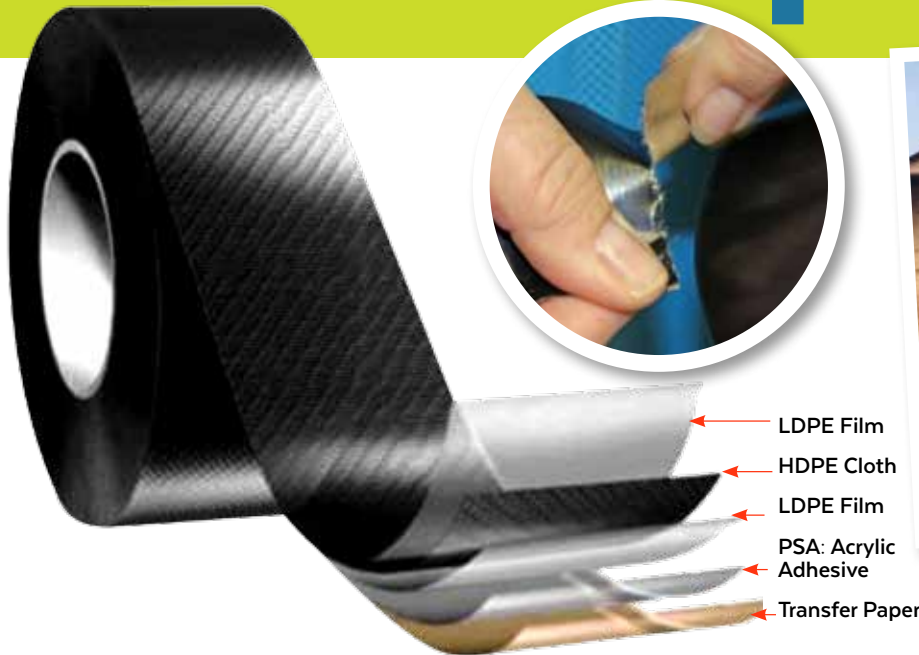

## Key Features and Benefits

- **Meets AAMA 711-13, ICC AC148 compliant, Voluntary Specification for Self Adhering Flashing Tape for Installation of Exterior Wall Fenestration Products, Type A (no primer), Class 3 (up to 176 degree F).**
- **Hand tearable**  
No cutting tools required
- **Lightweight**  
50-70 % lighter than conventional window flashing tapes
- **Nail Sealable**  
Passed AAMA-711-13 (ASTM D 1970)
- **Repositionable**  
No wrinkles when applied
- **No scrap from adhesive side contact by mistake**  
Clean, no black specks or stains, no asphalt smell
- **High dimensional stability**  
No wrinkling caused by temperature fluctuation
- **Wide application temperature**  
From -40°F to +200°F

- **High temperature resistance**  
No tensile strength losses after 45 weeks @ 194° F
- **Very strong adhesion to rough surfaces**
- **Low water vapor transmittance**  
< 1 Perm ( 20ng/Pa/sec/m2)
- **Excellent durability against sunshine**
- **Compatible with building sealants**  
Nichigo G-Tape™ is inert against sealant polymers, synthetic rubber compound, polyurethane, and silicone
- **Clean emission**  
No regulated chemical compounds in VOC from 3040BK



PART NO.	SIZE	DESCRIPTION	COLOR
GT3040BK02	2" x 65'	Nichigo G-Tape™ 3040BK	Black
GT3040BK04	4" x 65'	Nichigo G-Tape™ 3040BK	Black
GT3040BK06	6" x 65'	Nichigo G-Tape™ 3040BK	Black
GT3040BK09	9" x 65'	Nichigo G-Tape™ 3040BK	Black
GT3040BK12	12" x 65'	Nichigo G-Tape™ 3040BK	Black