



# DUST BAG CARRIAGE

**ALPHA**<sup>®</sup>  
ECO-CAR

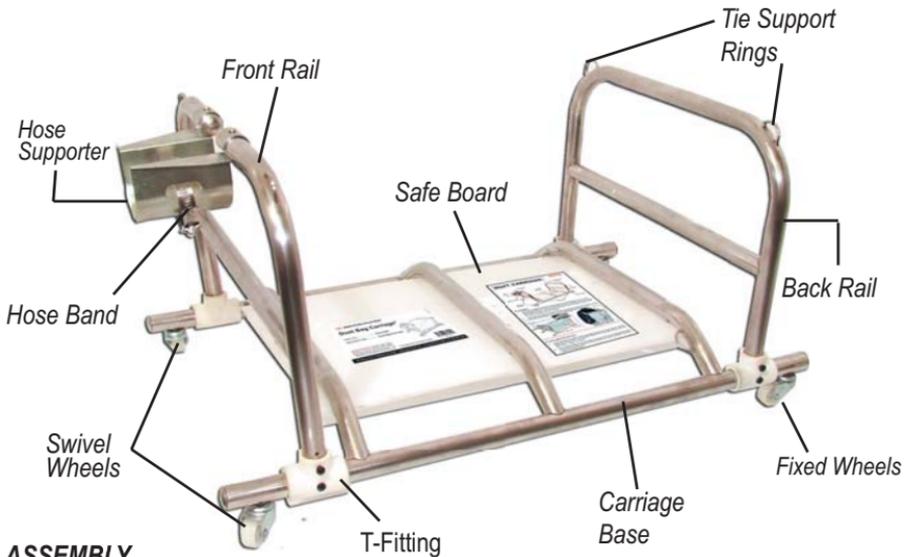

## ► ASSEMBLY

1. Insert front rail with Hose Supporter facing outwards into the T-Fittings at the front of the Carriage Base (Note: the *front of carriage base has Swivel Wheels for easy maneuvering*). Align clearance holes on rail with holes on T-Fittings. Insert the supplied screws on both ends and hand-tighten with a screw driver.
2. Insert back rail into the T-Fittings at the back of carriage base (Note: the *back of the carriage base has Fixed Wheels*). Follow steps for tightening the rail as stated above.

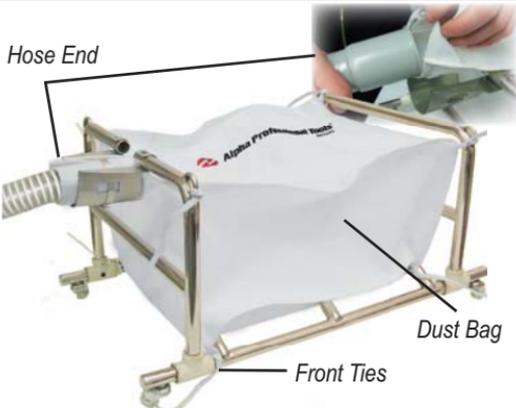

**NOTE:** The Dust Bag Carriage can also be used as a backpack for vertical applications and easy transport.

## ► ATTACHING THE DUST BAG

1. Using a flat-head screwdriver, remove the Hose Band from the Hose Supporter. Insert the Hose End into the mouth of the Dust Bag. Place in the Hose Supporter and secure with the Hose Band. Tighten to a snug fit.
2. Secure the Dust Bag to the dust bag carriage by tying each end to the Tie Support Rings located on the rails of the dust bag carriage. The lower front ties can be tied to the rail of the carriage base as shown in the photo above.