

1LPHA

TOOLS FOR TILE & STONE CONTRACTORS

CUTTING, PROFILING & POLISHING



Providing Better Solutions to the Professional

VERSION 05/2025

www.alpha-tools.com



WELCOME

Alpha Professional Tools® was founded in 1986 and has become a leading manufacturer of quality tools for professionals in the natural/engineered stone, porcelain, ceramic, glass, construction and hardscape industries. Alpha® provides the best products for cutting, drilling, shaping and polishing all types of materials.

In addition to providing the best products in the industry, Alpha Professional Tools® offers a variety of services to support their products.

Company Contact Information:

Headquarters & 16 Park Dr Ste 9 Training Center: Franklin, NJ 07416 Hours of Operation (EST): 8:30 a.m. - 5:00 p.m. Telephone No: 201-337-3343 Toll-Free No: 800-648-7229 Fax No: 201-337-2216

E-mail Orders to:

Toll Free Fax No:

orderdesk@alpha-tools.com tooldesk@alpha-tools.com

Contact Us:

800-286-0114

www.alpha-tools.com info@alpha-tools.com

Follow Us:

Ohio Valley

Pacific



440-364-3759

800-648-7229







Stone/Tile Division



201-644-2263

Sales Contacts by Territory - sales@alpha-tools.com

Canada Caribbean	519-546-9861 201-337-3343	South Southeast	480-848-6808 678-977-1147
Cambbean	201-337-3343	Councast	
International	201-337-3343	West	925-428-1292
Midwest	630-849-7105		
Northeast	973-600-7765	National Sales Man	agers
Ohio Valley	440-364-3759	Hardscape Division	973-830-7681

Safety Warning: Always wear eye and respiratory protection as well as proper personal safety equipment when using our products. Comply with ANSI B7.1 and OSHA Requirements.

TOOLS

51	IONE CUITER	
•	ESC-150, Wet Stone Cutter	1
•	ESC-150 Miter Cutting Kit	2
•	ESC-150 Countertop Trim Kit	3
•	ESC-125, Wet/Dry Stone Cutter	4
•	ESC-125 Countertop Trim Kit	
•	PSC-150 Miter Cutting Kit	
	PSC-150, Pneumatic Stone Cutter	
	AWS-110, Wet Stone Cutter	
	ECC-125, Ecocutter	
•	ECC-KIT, Dry Porcelain Paver Tile Cutting System	
•	ECC-KIT, DITY POICEIAITI Paver Tile Culting System	
GF	RINDERS	
•	ECG-900, Turnkey 9" Wet Electric Grinder	11
	PWC-658, Turnkey 6" Pneumatic System	
•	PSC-600, High-Performance Pneumatic Stone Cutter	15
•	F3C-600, Fight-Feriormance Friedmatic Stone Cutter	10
PC	OLISHERS	
:`	PSP-158, Next Gen Industrial Pneumatic Polisher	16
•		
	AIR-680UW, Pneumatic Polisher for Underwater Applications	
•	AIR-830 / 850, High Performance Pneumatic Polishers	
•	AIR-300, Mini Pneumatic Polisher	
•	VDP-700 Variable Speed Rotary Polisher	
	Wool Pads	
	Rotary Backer Pads	
	Diamond Face Foam Pads	
•	VSP-320, Variable Speed Wet Polisher	25
•	Eased Edge Tile Bullnose Kit	26
C	CUTTING	
_		
•	Cutting System Overview	27
W	ET/DRY BLADES	
•	Plus	28
•	Quad	
•	Eclipse II	29
•	Eclipse Q	29
•	Katana	30
•	Tuckpoint	30
•	Libero	
•	Trim Master	
•	Ultracut GPM Series	
	Ultracut APR Series	
	Olifacut At 14 Octios	
W	ET BLADES	
•	Laminam	33
•	Porcellana	
	Vetro	
•	Q-Cut.	
-	Cordless Saw Blade for Ceramic Tile	
:		
•	Cordless Saw Blade for Glass	
•	VOLTAY TOU LEGALIA	-3/

TABLE OF CONTENTS

	Vortex for Marble	
•	Contour for Granite & Engineered Stone	
•	Hot-Rod	
•	MasonMaster	
•		.40
BL	ADE ACCESSORIES	
•	Quad W Adapters	
•	Flange Adapters	
•	Dressing Stick	
•	Diamond Blade Re-Dressing Tool	
•	Pull-To-Cut Shroud Kit	
•	EZ Thin Tile Cutters.	
PF	ROFILING	
	Profiler B-Series	.45
•	Profiler V-Series	.46
•	Profiler Z-Series	.46
G	RINDING & SANDING	
	MINDING & GANDING	
SU	RFACE GRINDING	
•	Spike Disc	.47
•	Vextra Flat Disc	
• ED		
· ED	Vextra Flat Disc	.58
•	Vextra Flat Disc	.58
•	Vextra Flat DiscGE GRINDING	.58 .49
•	Vextra Flat Disc	.58 .49
SA:	Vextra Flat Disc	.58 .49
SA:	Vextra Flat Disc	.58 .49
SA:	Vextra Flat Disc	.58 .49 .50 .51
SA:	Vextra Flat Disc	.58 .49 .50 .51
SA:	Vextra Flat Disc	.58 .49 .50 .51
SA:	Vextra Flat Disc	.58 .49 .50 .51
SA:	Vextra Flat Disc	.58 .49 .50 .51 .52 .53 .53
PO DIA	Vextra Flat Disc GE GRINDING Vexcel Rigid Disc NDING VFlex Sanding Disc Sandpaper DLISHING MOND PADS Ceramic Three-Part Polishing System Ceramica Vitrified Ceramica Metal Ceramica Resin Ceramica Buff Ceramica EX	.58 .49 .50 .51 .52 .53 .54 .54 .55
PO DIA	Vextra Flat Disc	.58 .49 .50 .51 .52 .53 .54 .54 .55
SA: DIA:	Vextra Flat Disc	.58 .49 .50 .51 .52 .53 .54 .54 .55 .55
SA: DIA:	Vextra Flat Disc	.58 .49 .50 .51 .52 .53 .54 .55 .55
SA: DIA:	Vextra Flat Disc GE GRINDING Vexcel Rigid Disc NDING VFlex Sanding Disc Sandpaper DLISHING MOND PADS Ceramic Three-Part Polishing System Ceramica Vitrified Ceramica Metal Ceramica Resin Ceramica Buff Ceramica EX Ceramica TF. Y POLISHING DISCS Kiara Ceramica Dry	.58 .49 .50 .51 .52 .53 .54 .54 .55 .55
SA: DIA:	Vextra Flat Disc GE GRINDING Vexcel Rigid Disc NDING VFlex Sanding Disc Sandpaper DLISHING AMOND PADS Ceramic Three-Part Polishing System Ceramica Vitrified Ceramica Metal Ceramica Resin Ceramica Buff Ceramica EX Ceramica TF Y POLISHING DISCS Kiara Ceramica Dry Hand Pads	.58 .49 .50 .51 .52 .53 .54 .54 .55 .55
SA: DIA:	Vextra Flat Disc GE GRINDING Vexcel Rigid Disc NDING VFlex Sanding Disc Sandpaper DLISHING MOND PADS Ceramic Three-Part Polishing System Ceramica Vitrified Ceramica Metal Ceramica Resin Ceramica Buff Ceramica EX Ceramica TF. Y POLISHING DISCS Kiara Ceramica Dry	.58 .49 .50 .51 .52 .53 .54 .55 .55 .55 .56 .57 .58 .59

TABLE OF CONTENTS

PC	DLISHING WHEELS	
•	Turboshine	61
•	Antique Brush Wheels	
•	Felt Wheels	
BA	ACKER PADS	
•	Rigid Backer Pads	63
•	Flexible Backer Pads	
•	GV Backer Pads	
W	VET/DRY VACUUM	
•	HEPA Vacuum	64
D	OUST COLLECTION COVERS	
•	Ecoguard GX5	66
•	Ecoguard CX5	67
•	4" Wet/Dry Sanding and Polishing Kits	67
•	Ecoguard CD	
•	Ecoguard G7	
•	Ecoguard W6 / W9	69
D	RILLING	
•	Laser Core Bits	71
•	Core Bit Extenders	71
•	Trimmer Bits	72
•	Electroplated Drill Bits	72
AC	CCESSORIES	
•	EZ Wedge System	
•	EZ Click System	
•	EZ Click2 System	
•	Manifold System	
•	Twin Air/Water Hose (PSP-158/PWC-658)	
•	Air Hose (AIR-830 / AIR-850 / PSC-600)	
•	Water Hose (AIR-830 / AIR-850 / PSC-600)	
•	Air Hose (PSC-150)	78
•	Water Hose (PSC-150)	79
•	Adapter Hose	79
•	Mobile Hose	79
•	Exhaust Hose	79
•	Apron	
•	High-Visibility Lumbar Support Belt	
•	High-Visibility Safety Belt	83
•	Wet Blade Cutting Kits	
•	Wet Sanding / Polishing Kit	85
•	Pool Coping Kit	
•	GFCI (Ground Fault Circuit Interrupter)	85
•	Safety Glasses	
•	Toolbox	
•	G-Tape	
•	Rust Stain Remover	

ESC-150





- Powerful Motor For Use On Granite, Quartz Surfaces, Marble, Limestone, Concrete & Sintered/ Porcelain Slabs
- Capable of Miter Cutting 1-1/4" (3cm) Material w/ Ease
- Kink-Free Water Hose for Easy Maneuverability and Reducing Operator Fatigue
- Great For Sink-Hole Cutting, Groove Cutting/ Rodding
- Comes with A Built in Dust Gate for Dustless Cutting When Connected to A HEPA Vacuum
- Miter Cutting Kit available with ESC-150/ESC-250
- One Year Tool Warranty* (*See website for details)



SPECIFICATION	DATA
Model	ESC-150/ESC-250
Rating	110/220 Volts
Amperage	11.2A /5.5A
Power	1200W
No Load Speed (min-1)	10,000 RPM
Weight	11.30 lbs (5.12 kgs)
Arbor	7/8" (22.23mm)
Cutting Disc Diameter	6" (150mm)
Max. Cutting Depth	2" (50.88mm)
Cord	15ft (4.5m)Single- Phase
Plug Type	A (110V) / C (220V)

ITEM	QUANTITY
Side Handle	1
Screw (M6x30-Left)	1
Flange 3	1
Water Hose Assembly (15ft/4.5m)	1
Water Quick Coupler w/Shut-off Valve	1
Carbon Brush Set	1
Water Valve Assembly	1
SS Flat Head Screw (M4x10)	3
Ground Fault Circuit Interrupter	1
End Cap	1
T-Handle Wrench	1
Open-End Wrench (17mm)	1
Easy On-Easy Off Sleeve	1
Self-stick Felt Strip Set	1
Hex. Wrench (5mm)	1


PART NO.	SIZE	MAXIMUM RPM	TYPE	ARBOR(S)	DESCRIPTION
ESC-150	6"	10,000	110V	7/8" (22.23mm)	Wet/Dry Stone Cutter
ESC-250	6"	10,000	220V	7/8" (22.23mm)	Wet/Dry Stone Cutter

ESC-150 MITER CUTTING KIT



SAVE TIME & INCREASE PRODUCTIVITY





- Wet/Dry Electric Stone Cutters for Industrial **Applications**
- Powerful Motor For Use On Granite, Quartz Surfaces, Marble, Limestone, Concrete & Sintered/Porcelain Slabs
- One-Time setup on the Guide Rail allows for two different miter cut positions for lamination
- Precise Miter Cutting for Laminated Waterfall Edges and Book Matching
- Miter Cuts 1-1/4" (3cm) Materials with Ease

PART NO.	SIZE	TYPE	ARBOR(S)	DESCRIPTION
5480-5150	6"	110V	7/8" (22.23mm)	ESC-150 Miter Cutting Kit
5480-5152	6"	220V	7/8" (22.23mm)	ESC-250 Miter Cutting Kit

KIT INCLUDES: (2) ESC-150 Electric Wet/Dry Stone Cutters, (2) ASC-6CSM Guide Rail Carriage Assemblies, (2) 6" Eclipse II Blade (DEE0006), ASC Series Guide Rail Set (ASC-GR04, ASC-GR07, ASC-GR12), Surface Protection Tape (BAB0650)

ESC-150 COUNTERTOP TRIM KIT

COMPLETE TRIM KIT FOR A CUSTOM-LOOK



- Recommended for Hard Surfaces
- Eclipse II Blade has 8mm Tall Diamond Layer for a Long Life
- · Perfect for your Stone and Tile Application
- High-End General Purpose Turbo Blade for Stone Fabricators
- · Consistent Performance without Chipping
- One Year Tool Warranty (See website for details)

Complete Trim Kit for a Custom Look

LUDES:

Wet/Dry Stone Cutter ESC-150

6" Eclipse Blade DEE006

6" Carriage Assembly for Stone Cutter ASC-6CSM

4' Guide Rail with Clamps

Surface Protection Tape



PART NO.	DESCRIPTION			
5480-4250	Countertop Trim Kit (ESC-150)			
5480-4252	Countertop Trim Kit (ESC-250)			

ESC-125 / ESC-225





- Precision Cuts Everytime
 - Powerful Motor For Use On Granite, Quartz Surfaces, Marble, Limestone, Concrete and Sintered Slabs
- Water-Feed Supply Eliminates The Harmful Dust Particles
- Base Plate Allows Guides To Be Used in Multiple Ways
- Dust Cover for HEPA Vacuum Connection
- New Clamping System Ensures Cutting Stability
- Included Self-Stick Felt Strips Protects The Work Surface From Scratches
- Built-In GFCI (Ground Fault Circuit Interrupter)
- Great For Use With Curve Cutting Blades
- One Year Warranty (See website for details)



SPECIFICATION	DATA			
Model	ESC-125/ESC-225			
Rating	110 Volts/220 Volts			
Amperage	11.2A/5.5A			
Power	1200W			
No Load Speed (min	n-1) 12,000 RPM			
Weight	8.9 lbs (4.0 kgs)			
Arbor	7/8" (22.23mm)			
Cutting Disc Diamet	er 5" (125mm)			
Plug Type	A (110V)/C(220V)			
Cord	15ft (4.5m)Single- Phase			
Max. Cutting Depth	1-5/8" (41mm)			
PART NO.	SIZE TYPE			

ITEM	QUANTITY
Dust Cover	1
Knob Bolt	3
TT Ruler Guide	1
Water Hose Assembly	1
Quick Connect Adapter	1
Side Handle	1
Screw (M6x30-Left)	1
Flange 3	1
Carbon Brush Set	1
T-Handle Wrench	1
Open-End Wrench (22mm)	1
Self-stick Felt Strip Set	1
GFCI	1
EasyOn-EasyOff Sleeve	1
SS Flat Head Screw (M4×10)	3
Water Valve Assembly	1
ABBOB(S) DESCE	UDTION

PART NO.	SIZE	TYPE	ARBOR(S)	DESCRIPTION
ESC-125	5"	110V	7/8" (22.23mm)	Wet/Dry Stone Cutter
ESC-225	5"	220V	7/8" (22.23mm)	Wet/Dry Stone Cutter

COUNTERTOP TRIM KIT

COMPLETE TRIM KIT FOR A CUSTOM-LOOK



Complete Trim Kit for a Custom Look

CLUDES:

Wet/Dry Stone Cutter ESC-125

5" Eclipse Blade DEE005

5" Carriage Assembly for Stone Cutter ASC-5CSM

4' Guide Rail with Clamps ASC-GR04

- · Recommended for Hard Surfaces
- Eclipse II Blade has 8mm Tall Diamond Layer for a Long Life
- · Perfect for your Stone Tile Application
- High-End General Purpose Turbo Blade for Stone Fabricators
- Consistent Performance without Chipping
- Kit Contains: ESC-125 Stone Cutter, 5" Carriage Assembly, 5" Eclipse II Blade and 4' Guide Rail
- One Year Tool Warranty (See website for details)

PART NO.	DESCRIPTION
5480-4150	Countertop Trim Kit (ESC-125)
5480-4152	Countertop Trim Kit (ESC-225)

PSC-150 MITER CUTTING KIT

COMPLETE MITER CUTTING KIT FOR A WATERFALL EDGE



Pneumatic Stone Cutter
(2) PSC-150
6"Carriage Assembly
for Pneumatic Stone Cutter

(2) ASC-6CSM

Guide Rails with Clamps 4', 7', 12' (Connector & 4 Screws) ASC-GR04 | ASC-GR07 | ASC-GR12

Surface Protection Tape BAB0650

- One-Time Easy Setup on the Guide Rail Allows for Two Different Miter Cut Positions for Lamination Prep
- Precise Miter Cutting for Laminated Waterfall Edges and Book Matching
- Miter Cut 3/4" (2cm) Material with Ease

PART NO.	DESCRIPTION
5480-5100	Miter Cutting Kit (PSC-150)

PSC-150



SPECIFICATION	DATA		
Model	PSC-150		
Air Pressure	90 PSI		
Air Consumption Min	32 CFM / 1HP*		
Air Consumption Max	48 CFM / 2HP		
No Load RPM	8,500 RPM		
Air Inlet	3/8" NPSM		
Water Inlet	1/4" BSPP		
Arbor	7/8" (22.23mm)		
Max. HP	2.0HP		
Cutting Disc Diameter	6" (150mm)		
*To control the amount of CFM required, use the reduced flow air inlet fitting 3001-0084			
100000000000000000000000000000000000000			



PNEUMATIC STONE CUTTER

- 2 HP Pneumatic Powered Motor with Speed Governor
- Capable of Miter Cutting 1-1/4" Material With Ease
- Kink-Free Water and Air Hoses for Easy Maneuverability and Reducing Operator Fatigue
- Great For Sink-Hole Cutting, Groove Cutting and Rodding Applications
- Comes With An Eclipse II 6" Blade and a Bottle of Rust Inhibitor Oil
- Can Be Used Wet or Dry
- One Year Warranty (See website for details)

ITEM	QUANTITY
Flanges	3
Bolts (M6X30 Left) / (M6x20 Left)	2
Side Handle	1
Combination Wrench (9mm)	1
Hex Wrench (5mm)	1
Open End Spanner Wrench (22mm)	1
Air Hose (15ft / 4.5m)	1
Water Hose (15ft / 4.5m)	1
Rust Inhibitor Oil (8oz / 237ml)	1
Alpha® Eclipse II 6" Blade (DEE006)	1
Reduced Flow Air Inlet Fitting (3001-0084)	1

PART NO.	SIZE	RECOMMENDED FOR	ARBORS/ RPMS	DESCRIPTION	
PSC-150	6"	Granite/Engineered Stone	7/8", 22.23mm	Pneumatic Stone Cutter	
DEE006	6"	2.1mm	10,100	7/8", 5/8",◊	
AIR-008		Pneumatic Tools		Rust Inhibitor Oil 8oz (237ml)	
5480-5100				PSC-150 Miter Cutting Kit	

AWS-110 / AWS-220

WET STONE CUTTER



- Produces Straight and True Cuts Everytime
- Powers Through Hard Dense Materials, Such As, Porcelain, Hard Red Granites and Engineered Stone
- Water-Feed Supply Eliminates The Harmful Dust Particles
- Base Plate Allows Guides To Be Used in Multiple Ways
- Included Self-Stick Felt Strips Protects The Work Surface From Scratches
- Built-In GFCI (Ground Fault Circuit Interrupter)
- One Year Warranty (See website for details)

	No.				
SPECIFICATION	DATA		MET TO A	4	
Model	AWS-110/	AWS-220			OHANTITY
Rating	110/220 V	olts	ITEM		QUANTITY
Amperage	11.2A (5.5	5A)	Ground Fault Circuit Interrupter		1
Power	1200W		Water Valve and Hose		1
No Load Speed (min-1)	13,000 RF	PM	Water Attachment Assembly		1
Weight	6.8 lbs (3.	1 kgs)	Spanner Wrench M22		1
Arbor	20mm		TT Ruler Guide		1
Cutting Disc Diameter	4" (100mm 4-1/2" (115		T-Handle Wrench		1
Maximum Cutting Depth 1-1/4" (32mm)			Extra Carbon Brus Self-stick Felt Strip		1
Берш			Jen-stick Felt Strip	361	'
PART NO.	SIZE	TYPE	ARBOR(S)	DES	SCRIPTION
AWS-110	4-1/2"	110V	20mm	Wet	Stone Cutter
AWS-220	4-1/2" 22		20mm	Wet	Stone Cutter

ECC-125





- Virtually Dust-Free
- Portable Cutting System
- Accurate Cutting Performance
 - Eliminates Downtime
- Built-in In-line circuit breaker
- Great for Grout Removal, Crack Chasing & Concrete Profiling
- One Year Warranty (See website for details)

SPECIFICATION	DATA
Model	ECC-125
Rating	110 Volts
Amperage	11.2A
Power	1200W
No Load Speed (min-1)	12,000 RPM
Weight	9.5 lbs (4.3 kgs)
Arbor	7/8" (22.23mm)
Cutting Diameter	5" (125mm)
Maximum Cutting Depth	1-1/8" (29mm) (Without Ecocutter Table)

ITEM	QUANTITY
Dust Hose	1
Dust Gate	1
Side Handle	1
Hexagon Ring Spanner	1
Wrench	1
Dust Bag	1
TT Ruler	1
Hook & Loop Strap	2

PART NO.	SIZE	TYPE	ARBOR(S)	DESCRIPTION
ECC-125	5"	110V	7/8" (22.23mm)	Ecocutter



ECC-KIT

DRY PORCELAIN PAVER TILE CUTTING SYSTEM



- · Virtually Dust-Free
- Portable Cutting System
- Accurate Cutting Performance
- Eliminates Downtime and The Messy Cleanup
- · Built-In Breaker Assembly
- Holds 3/4" Thick Porcelain Paver Tile
- One Year Tool Warranty (See website for details)

SPECIFICATION	DATA
Model	ECC-KIT (ECC-125)
Rating	110 Volts
Amperage	11.2A
Power	1200W
No Load Speed (min-1)	12,000 RPM
Weight	9.5 lbs (4.3 kgs)
Arbor	7/8" (22.23mm)
Cutting Diameter	5"(125mm)
Maximum Cutting Depth	1-1/8" (29mm) (without Ecocutter Table)

EQUIPMENT INCLUDED	QUANTITY
ECC-125	1
Dust Hose	1
Dust Gate	1
Side Handle	1
Hexagon Ring Spanner	1
Wrench	1
Dust Bag	1
TT Ruler Guide	1
Hook & Loop Strap	2
Ecocutter Table	1
Ecocutter Stand	1
Alpha® Ultracut GPM 5"	1

PART NO.	SIZE	TYPE	ARBOR(S)	DESCRIPTION
ECC-KIT	5"	110V	7/8" (22.23mm)	Dry Cutting System
ECC-125	5"	110V	7/8" (22.23mm)	Ecocutter
133544	17"x13-1/2 x 12"			Dust Bag w/strap
ECC-STAND				Dry Cutting System Stand
ECC-TABLE				Dry Cutting System Table
170005				Ecocutter DVD
PART NO.	SIZE	THICKNESS	MAX RPM	ARBOR(S)
GPM0578	5"	1.5mm	12,200	7/8"

GRINDERS



11

ECG-900

9" WET HIGH-SPEED ELECTRIC ANGLE GRINDER




- Wet High-Speed Electric Angle Grinder for Concrete, Stone and The Hardscape Industry
- Can be used for Cutting, Grinding, Profiling and Core Drilling
- Rotating Handle, C-Handle and Shockproof Side Handle, with Extension Bracket, Makes for A Comfortable and Safe Application
- · Memory Wrap Keeps Cords/Hoses Organized
- Quad-W5 Drive Delivers Water to the Cutting Edge Efficiently
- A MasonMaster 9" Blade (MM00912) Is Included To Start Cutting Immediately
- Can Be Used Dry with An Ecoguard and HEPA Vacuum
- One Year Warranty (See website for details)



SPECIFICATION	DATA
Model	ECG-900 /ECG-914
Rating	110/220 Volts
Amperage	15A/7.2A
Power Supply	Single-phase AC, 50,60Hz
No Load Speed (min-1)	6,200
Weight	12.3 lbs (5.6 kgs)
Spindle	5/8"-11/M14-2
Cutting Disc Diameter	9" (230mm)
Max. Cutting Depth	3-3/8" (87mm)
Cord	15ft (4.5m) (14 AWG)
Plug Type	A (110V) / C (220V)

ITEM	QUANTITY
9" Blade Guard Assembly	1
9" MasonMaster Blade	1
Quad-W5 Adapter Assembly	1
C-Handle Assembly	1
Side Handle Extension Bracket Assembly	1
Carbon Brush Set	1
Hex Wrench (6mm)	1
Side Handle	1
Ground Fault Circuit Interrupter	1
Splash Guard	1
Water Hose (15ft/4.5m)	1
Quick Connect w/ Shut off Valve	1
Memory Wrap (3ft/1m)	1

PART NO.	SIZE	MAX RPM	TYPE	THREADS	DESCRIPTION
ECG-900	9"	6,200	110V	5/8"-11	Wet High-Speed Electric Angle Grinder
ECG-914	9"	6,200	220V	M14-2	Wet High-Speed Electric Angle Grinder
QUAW5058				5/8"-11	5-Hole Aluminum Adapter (7/8" Arbor)
QUAW5M14				M14-2	5-Hole Aluminum Adapter (22mm Arbor)

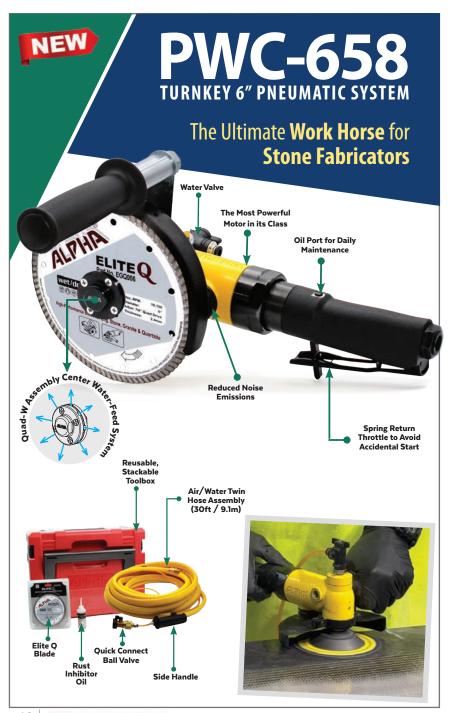

PWC-658



HIGH-PERFORMANCE PNEUMATIC STONE CUTTER/GRINDER

- High-Speed, High-Performance Pneumatic Angle Cutter/Grinder
- Reversible Safety Guard For Left Or Right Blade Position
- L-Bracket & Side Handle Setup For Pull-To-Cut Method
- Side Handle Attachment For Push-To-Cut Method
- Spring-Return Throttle Avoids Accidental Start
- · Easy Access Oil Port for Daily Maintenance
- Quad Adapter Center Water-Feed System
 Provides Direct Water Flow to Front and Back Side
 Of The Blade
- Center Water Feed-System Is Perfect For Flat Grinding
- One Year Tool Warranty*



SPECIFICATION	DATA
Model	PWC-658 / PWC-514/ PWC-614
Air Pressure	90 PSI (6.2 Bar)
Air Consumption	33 CFM (934L/min)
Weight	4.6 lbs (2.1 kgs)
No Load Speed	10,000 RPM / 12,000 RPM 10,000 RPM
Air Inlet	3/8" NPSM
Water Inlet	1/8" BSPT
Spindle	5/8"-11 / M14-2
Max. HP	1.4 HP
Max. Disc Size	6" (150mm) / 5" (125mm)

ITEM	QUANTITY
Air/Water Twin Hose Assembly (30ft / 9.1m)	1
Alpha® Elite Q Blade	1
Quad W Adapter Assembly	1
Safety Guard	1
Rust Inhibitor Oil (3.4oz / 100ml)	1
Quick Connect Ball Valve	1
Handle Bracket Assembly	1
Side Handle	1
Hex Wrench (2mm)	1
Hex Wrench (5mm)	1
Spanner Wrench (19mm)	2
Extension Rod & Nylon Lock Nut (M12)	1
Reusable, Stackable Toolbox	1

PART NO.	SIZE	MAX RPM	THREADS	DESCRIPTION
PWC-658	6"	10,000	5/8"-11	Pneumatic High-Speed Cutter/Grinder
PWC-514	5"	12,000	M14-2	Pneumatic High-Speed Cutter/Grinder
PWC-614	6"	10,000	M14-2	Pneumatic High-Speed Cutter/Grinder

PSC-600



SPECIFICATION	DATA
Model	PSC-600
Air Pressure	85 PSI (6 Bar)
Air Consumption	15 CFM (425L/min)
Weight	2.9 lbs (1.3 kgs)
No Load RPM	8,500 RPM
Air Inlet	1/4" BSPP
Water Inlet	1/8" BSPP
Arbor	7/8" (22.23mm)
Cutting Disc Diameter	6" (150mm)
Length	7-1/2" (190.5mm)



HIGH-PERFORMANCE PNEUMATIC STONE CUTTER/GRINDER

- Center Water-Feed System to Deliver Ample Water Regardless of Position
- 15ft. All-Weather Hoses with Flexibility Down To -40°F Or +140°F(-40°C To +60°C)
- Newely Developed Motor Produces More Power
- Lightweight and Ergonomically Designed for Better Maneuverability
- Composite End Case to Prevent Freezing Hands
- Silicon Gear Head Cover Provides Cushion and Keeps Hands Warm
- Enhanced Spindle Shaft for Easy Tool Removal (Wrench included)
- One Year Warranty (See website for details)

ITEM	QUANTITY
Air Hose (15ft / 4.5m)	1
Water Hose (15ft / 4.5m)	1
Side Handle (reversible)	1
Rust Inhibitor Oil (6.7oz/200ml)	1
Screw (w/O-Ring Seal for Oil Port)	1
Exhaust Hose & Clamp	1
Spring Washer	1
6" Safety Guard	1
Double End Wrench (19mm/22mm)	1
Phillips Screwdriver	1
Water Quick Coupler w/Shut-off Valve	1
O-Ring (O-Ring for Water Valve Repair	1
Single Open End Wrench (22mm)	1
Hex Wrench (6mm)	1
Inner Flange for Cutting	1
Outer Flange	1
L-Bracket	1
Inner Flange for Grinding	1

PART NO.	MAX RPM	RECOMMENDED FOR	DESCRIPTION
PSC-600	8,500	Cutting/Grinding	Pneumatic Stone Cutter
AIR-008		Pneumatic Tools	Rust Inhibitor Oil 8oz (237ml)



PSP-158





SPECIFICATION	DATA
Model	PSP-158 / PSP-114
Air Pressure	90 PSI (6.2 Bar)
Air Consumption	21 CFM (594L/min)
Weight	3 lbs (1.37 kgs)
No Load RPM	5,500 RPM
Air Inlet	1/4" BSPT
Water Inlet	1/8" BSPT
Spindle	5/8"-11 / M14-2
Max. HP	0.70 HP

ITEM	QUANTITY
Air/Water Twin Hose Assembly (30ft / 9.1m)	1
Rust Inhibitor Oil (3.4oz / 100ml)	1
Durable Woven Exhaust Hose with Clamp	1
Quick Connect Ball Valve	1
Reusable Toolbox	1

NEXT GEN INDUSTRIAL PNEUMATIC POLISHER

- Next Generation Polisher from Alpha®
- High-Performance industrial Pneumatic Polisher
- Powerful New Motor for Demanding Applications
- Comes With 30' Kink-Free Twin-Air/Water Hose for Better Maneuverability
- All-Weather Hoses with Flexibility Down To -40°F Or +140°F
- Quarter-Turn Switches for Precise Control
- Central Water-Feed System Delivers Ample Water Regardless of Position
- No-Load RPM- 5,500
- · Comes In A Reusable Toolbox
- Silicon Gear Head Cover Provides Cushion and Keeps Hands Warm
- One Year Warranty (See website for details)





PART NO.	MAX RPM	THREADS
PSP-158	5,500	5/8″-11
PSP-114	5,500	M14-2

AIR-680UW

HIGH-PERFORMANCE UNDERWATER PNEUMATIC POLISHER



- Central Water-Feed System Delivers Ample Water Regardless of Position for Plaster Polishing
- No-Load RPM- 4,000
- 15ft. All-Weather Air & Water Hoses with Flexibility Down To -40°F Or +140°F
- 30ft. All-Weather Air Hose with Flexibility Down To -40°F Or +140°F
- 27ft, Flexible Exhaust Hose included
- 7" Flexible Backer Pad included
- Lightweight and Ergonomically Designed for Better Maneuverability

- Side and C-Handle are Standard Accessories
- Enhanced Spindle Shaft for Easy Tool Removal (Wrench Included)
- One Year Warranty* (*See website for details)

ITEM	QUANTITY
Air Hose (15ft / 4.5m)	1
Water Hose (15ft / 4.5m)	1
Air Hose (30ft / 9.0m)	1
Side Handle (reversible)	1
C-Handle	1
Double End Wrench (19mm/22mm)	1
Screw (w/O-Ring Seal for Oil Port)	1
Phillips Screwdriver (P1)	1
Exhaust Hose with Clamp	1
Flexible Vacuum Hose (27ft / 8.1m)	1
Water Quick Coupler w/Shut Off Valve	1
Rust Inhibitor Oil (6.7oz / 200ml)	1
Rotary Backer Pad 7" (MP758HL)	1
PlasterKing Polishing Pad 7" #50	1
PlasterKing Polishing Pad 7" #100	1

SPECIFICATION	DATA
Model	AIR-680UW
Air Pressure	85 PSI (6 Bar)
Air Consumption	15 CFM (425L/min)
Weight	2.64lbs (1.2 kgs)
No load Speed	4,000 RPM
Air Inlet	1/4" BSPP
Water Inlet	1/8" BSPP
Spindle	5/8"-11

PART NO.	SIZE	THICKNESS	MAX RPM	TYPE	THREADS	RECOMMENDED FOR
AIR-680UW			4,000	Pneumatic Polisher	5/8"-11	Underwater Wet Polishing, Drilling & Profiling
PS070050	7"	5mm	5,500	Hook & Loop		Pool Plaster
PS070100	7"	5mm	5,500	Hook & Loop		Pool Plaster

Ergonomic and lightweight for **better maneuverability**

AIR-830



AIR-850



ITEM	QUANTITY
Air Lead Hose 15ft. (4.5m)	1
Water Hose 15ft. (4.5m)	1
Side Handle (reversible)	1
Rust Inhibitor Oil (1oz / 30cc) (Replace with: AIR- 008)	1
Screw (w/ O-Ring Seal for Oil Port)	1
Exhaust Hose with Clamp	1
Spring Washer	1
Splash Guard	1
Double End Wrench (19mm / 22mm)	1
Phillips Screwdriver	1
Water Quick Coupler w/Shut- off Valve	1
O-Ring (O-Ring for Water Valve Repair)	1

- Newly Developed Motor Produces More Power with Hybrid Vanes
- Silicon Gear Head Cover
 Provides Cushion and Keeps
 Hands Warm
- New Splash Guard Allows for Better Visibility Without Being Splashed
- Enhanced Spindle Shaft for Easy Tool Removal (Wrench Included)
- One Year Warranty (See website for details)



Rust Inhibitor Oil (6.7oz / 200ml)

BUY MACHINE ONLY AND SAVE!!





AIR-830 / AIR-834



4,000 RPM Gear Set for Best Quality Results

HIGH-PERFORMANCE **PNEUMATIC POLISHER**

SPECIFICATION	DATA
Model	AIR-830/AIR-834
Air Pressure	85 PSI (6 Bar)
Air Consumption	15 CFM (425L/min)
Weight	2.75 lbs (1.2 kgs)
No load Speed	4,000 RPM
Air Inlet	1/4" BSPP
Water Inlet	1/8" BSPP
Spindle	5/8"-11 / M14-2

PART NO.	MAX RPM	THREADS	RECOMMENDED FOR
AIR-830	4,000	5/8"-11	Wet Polishing, Drilling & Profiling
AIR-834	4,000	M14-2	Wet Polishing, Drilling & Profiling
AIR-830M	AIR-830+Rust Inhibitor Oil ONLY (No other accessories)		
AIR-834M	AIR-834+Rust Inhibitor Oil ONLY (No other accessories)		

AIR-850 / AIR-854



5,500 RPM Gear Set for Best Productivity

HIGH-PERFORMANCE PNEUMATIC POLISHER

SPECIFICATION	DATA
Model	AIR-850/AIR-854
Air Pressure	85 PSI (6 Bar)
Air Consumption	15 CFM (425L/min)
No load Speed	5,500 RPM
Weight	2.75 lbs (1.2 kgs)
Air Inlet	1/4" BSPP
Water Inlet	1/8" BSPP
Spindle	5/8"-11 / M14-2

PART NO.	MAXIMUM RPM	THREADS	RECOMMENDED FOR
AIR-850	5,500	5/8"-11	Wet Polishing, Drilling & Profiling
AIR-854	5,500	M14-2	Wet Polishing, Drilling & Profiling
AIR-850M	AIR-850+Rust Inhibitor Oil ONLY (No other accessories)		
AIR-854M	AIR-854+Rust Inhibitor Oil ONLY (No other accessories)		

AIR-300 / AIR-304





- High-Performance, Pneumatic Polishing Tool with A Central Water-Feed System
- No-Load 5,800 RPMs
- Lightweight and Ergonomically Design Reduces Fatigue
- Designed To Easily Maneuver in Small Areas Like Sink Rims and Bowls
- Consumes 10 CFM and Requires 87 PSI
- · Only Requires 3HP Compressor
- One Year Warranty (See website for details)

DATA	
AIR-300/AIR-304	
87 PSI (0.6Mpa (6 bar))	
10 CFM (280L/Min)	
5,800 RPM	
1.6 lbs / .731 kgs	
1/4" BSPT	
1/4" BSPP	
5/8"-11 / M14-2	



ITEM	QUANTITY
Air Hose 10ft (3m)	1
Water Hose 10ft (3m)	1
Faucet/Garden Hose Adapter	1
Wrench (17mm)	1
Rust Inhibitor Oil (1oz / 30cc) (Replace with: AIR-008)	1



PART NO.	MAXIMUM RPM	THREADS	RECOMMENDED FOR	DESCRIPTION
AIR-300	5,800	5/8"-11	Wet Polishing	Mini Pneumatic Polisher
AIR-304	5,800	M14-2	Wet Polishing	Mini Pneumatic Polisher
AIR-008			Pneumatic Tools	Rust Inhibitor Oil 8oz (237ml)

VDP-700

WET/DRY VARIABLE SPEED ROTARY POLISHER



*Backer and Pad Not Included

- Variable Speed 700-3500 RPM with Soft Start
- Designed For The Polishing Professional
- Heavy-Duty Precision Gear System
- Powerful 11.0 Amp (rated) Motor
- Built-in Speed Stabilizer for Constant Speed Output
- Configured with A Long-life Motor and Carbon Brushes
- 25ft, 14 AWG Electrical Power Cord
- Lightweight for Better Manueverabilty
- Industrial Quality Polisher
- C-Handle & Side Handle for User Convenience
- One Year Warranty (See website for details)

SPECIFICATION	DATA
Model	VDP-700/VDP-714
Rating	120/230 Volts
Amperage	11.0A / 5.4A
Power	1250W (Rated), 1900W (Maximum)
No Load Speed (Variable)	700~3500 RPM w/Soft Start
Weight	6.4 lbs (2.9 kgs)
Spindle	5/8"-11 / M14-2
Power Supply	Single-phase AC, 50/60Hz
Plug Type	A (120V) / C(230V)
Cord	25ft (7.6m) / 16.8ft (5.1m) (14 AWG)
Backing Plate Size	7" (178mm) (Maximum)
Polishing Disc Size	9" (228mm) (Maximum)

ITEM	QUANTITY
Spanner Wrench	1
Hex Wrench	1
C-Handle w/Mounting Screws	1
Side Handle	1
Extra Carbon Brush Set	1



*Backer and Pad Not Included

PART NO.	SIZE	MAX RPM	TYPE	THREADS	DESCRIPTION
VDP-700	7"	700-3500	120V	5/8"-11	Variable Speed Rotary Polisher
VDP-714	7"	700-3500	230V	M14-2	Variable Speed Rotary Polisher

WET SANDING/ POLISHING KIT

KIT Part # WSPKIT



(optional)



WOOL PADS

REMOVES DEEP SCRATCHES WITH EASE



- Removes Deep Scratches, Overspray & Severe Swirl Marks With Ease
- Premium Performance and Heat-Resistent
- Smoothier Handling and Reduced Vibration
- · For Use on Rotary Polishers
- · Great for Heavy Oxidation

PART NO.	SIZE	TYPE	RECOMMENDED FOR	MATERIAL	GRIT
WP003160	3"	Hook & Loop	Heavy Cutting	High-Nap Knitted Wool	T160
WP006160	6"	Hook & Loop	Heavy Cutting	High-Nap Knitted Wool	T160
WP007160	7"	Hook & Loop	Heavy Cutting	High-Nap Knitted Wool	T160

ROTARY BACKER PAD

FOR USE ON ROTARY POLISHERS



- Soft Molded Urethane With Flexible Edge
- Urethane Backing Makes for Greater Flexibility and Excellent Polishing
- · Ideal for Contour Polishing
- For Use with Foam, Wool & Microfiber Pads
- Hook & Loop Allows for Fast Pad Changes
- Well Balanced for Smooth Polishing
- Absorbs Vibrations and Has Great Rebound Performance





Hook & Loop

Adhesive

PART NO.	SIZE	TYPE	RECOMMENDED FOR	THREADS
MP358HL	3"	Hook & Loop	Foam, Wool & Microfiber Pads	5/8"-11
MP558HL	5"	Hook & Loop	Foam, Wool & Microfiber Pads	5/8"-11
MP658HL	6"	Hook & Loop	Foam, Wool & Microfiber Pads	5/8"-11
MP758HL	7"	Hook & Loop	Foam, Wool & Microfiber Pads	5/8"-11
MP858HL	8"	Hook & Loop	Foam, Wool & Microfiber Pads	5/8"-11
MP858GL	8"	Adhesive	Foam, Wool & Microfiber Pads	5/8"-11

DIAMOND FACE FOAM PADS

DESIGNED FOR BOTH ROTARY & DA POLISHER




- DESIGNED FOR BOTH ROTARY & DA POLISHERS
- REDUCED POLISH SPLASH AND HEAT BUILD-UP
- SMOOTHIER HANDLING AND REDUCED VIBRATION
- CAN WITHSTAND HIGH TEMPERATURES AND WATER WASH
- GREAT FOR USE ON SCRATCH RESISTANT/CERAMIC PAINTS

PART NO.	SIZE	TYPE	COLOR	RECOMMENDED FOR	GRIT
FPG04120	4"x1"	Hook & Loop	Green	High Cutting	T120
FPG06120	6"x1"	Hook & Loop	Green	High Cutting	T120
FPG07120	7"x1"	Hook & Loop	Green	High Cutting	T120
FPY04080	4"x1"	Hook & Loop	Yellow	Medium Cutting	T80
FPY06080	6"x1"	Hook & Loop	Yellow	Medium Cutting	T80
FPY07080	7"x1"	Hook & Loop	Yellow	Medium Cutting	T80
FPB04020	4"x1"	Hook & Loop	Black	Finishing/Polishing	T20
FPB06020	6"x1"	Hook & Loop	Black	Finishing/Polishing	T20
FPB07020	7"x1"	Hook & Loop	Black	Finishing/Polishing	T20
FPR04010	4"x1"	Hook & Loop	Red	Finishing/Finessing	T10
FPR06010	6"x1"	Hook & Loop	Red	Finishing/Finessing	T10
FPR07010	7"x1"	Hook & Loop	Red	Finishing/Finessing	T10

VSP-320 / VSP-340





- Heavy-Duty Gear System with Step-Down Transmission
- 15ft. Flexible All-Weather Water Hose
- 15ft. Electrical Power Cord Has An Inline GFCI
- EasyOn-EasyOff Sleeve Improves Maneuverability
- · Adjustable Splash Guard
- · Center Water-Feed System
- Ventilation Cap Diverts Water from Getting Into Motor Housing
- C-Handle & Side Handle for User Convenience
- One Year Warranty (See website for details)

SPECIFICATION	DATA	
Model	VSP-320/VSP-340	
Rating	120 Volts/230 Volts	
Amperage	7.0A/3.5A	
Power	800W	
No Load Speed (Variable)	700~2500 RPM	
Weight	7.3 lbs (3.3 kgs)	
Spindle	5/8"-11 / M14-2	
Power Supply	Single-phase AC, 50/60Hz	
Plug Type	A (120V)/C (230V)	
Cord	15ft (4.5m)	
Polishing Disc Size	4" (100mm)	

Polishing Disc Size 4 (100)111111)
ITEM	QUANTITY
Ground Fault Circuit Interrupter*	1
Flexible Hose w/ Garden Hose Adapter*	1
Wrench	1
C-Handle w/ Mounting Screws*	1
Side Handle (Reversible)	1
Extra Carbon Brush Set	1
Ventilation Cap w/ Rubber Band*	1
Splash Guard w/ Clamp	1

PART NO.	TYPE	DESCRIPTION
VSP-320	120V	Variable Speed Wet Polisher
VSP-340	230V	Variable Speed Wet Polisher





*Factory Attached

EasyOn-EasyOff Sleeve*

EASED EDGE TILE BULLNOSE KIT

CREATES A FACTORY FINISH ON-SITE



- Designed To Create A Bullnose Edge On Tile or Stone and Polish It To A Factory Quality Finish
- Goof-Proof Hand-Held Application
- Quality Finish Without The Factory
- Save Time and Money
- Kit Contains: VSP-320 Polisher, Profiler B, 4" Ceramica EX Polishing Discs, 4" Flexible Backer Pad and Apron
- One Year Tool Warranty (See website for details)







KIT INCLUDES: VSP-320, PFB101, GP45/8PD, EX40200R,

EX40500R, EX41000R, EX42000R, EX43000R and APRON2000



PART NO.	DESCRIPTION
5480-1400	Tile Bullnose Kit (VSP-320)

CUTTING SYSTEM OVERVIEW

KEY: • = Highly Recommended o = Recommended

	DR'	Y CUTTING BLADE	ES			
ALPHA® BLADES	SPECIALTY	BUILDING STONE FABRICATORS	TILE CONTRACTORS	MONUMENT BUILDERS	GENERAL CONTRACTORS	HARDSCAPE
MasonMaster	Demolition/Concrete Cutting				•	•
Contour for Granite / Eng. Stone	Curved Applications	•	0			0
Contour for Porcelain	Curved Applications	•	0			•
Eclipse II	General Purpose	•	0	0	•	0
Eclipse Q	General Purpose	•	0	0	•	0
Elite Q	Eng. Stone, Granite, Quartzite	•	•		0	
HardscapePro Q	General Purpose Brick / Concrete Paver Tiles				•	•
Hot-Rod	Channel Cutting	•	0	0	0	0
Katana	All Tiles	0	•	0	0	•
Katana Q	All Tiles, 2cm Porcelain Paver Tile	0	•	0	0	•
Laminam	Laminam by Crossville® / Porcelain Panels	0	•		0	•
Libero	Marble	•	•	0	0	0
Plus	Granite & Harder Materials	•	0	•	0	0
PT Cutter	Porcelain Paver Tile	0	•		0	•
Quad	Flush Cutting	•	0	•	0	0
Rescue Blade	General Purpose	0			0	•
Trim Master	Miter Saws	•	0		0	0
Tuck Point	Tuck Pointing				0	•
Ultracut ABM	Cut-Off Tools	0	0		•	0
Ultracut APR	Flush Cutting	0	0		•	0
Ultracut GPM	Metal & Composite Materials	0	0		•	•
Vortex for Granite	Flush Cutting	•	0	•		0
Vortex for Marble	Flush Cutting		0	•		0
		T CUTTING BLADE	ES			
ALPHA® BLADES	SPECIALTY	BUILDING STONE FABRICATORS	TILE CONTRACTORS	MONUMENT BUILDERS	GENERAL CONTRACTORS	HARDSCAPE
BG	Glass Blade for Cordless Saw		•		•	•
BT	Tile Blade for Cordless Saw		•		•	•
Groove Cutter	Groove Cutting	•	0	0	0	0
Knock Out	Granite	•				0
Marble Profile Wheel	Cut & Profile Tile	0	•		0	0
Porcellana	All Tiles	0	•		0	•
Q-Cut	Quartzite & Granite	•	•		0	•
Silencer III	Granite	•	0	•	0	0
Silencer III	Marble	•	0	•	0	0
Silencer III	Porcelain/Crystallized Glass	•	0		0	0
Silencer III	Engineered Stone	•	0		0	0
Silencer III	Dekton®	•	0		0	0
Silencer III	Quartzite	•	0	•	0	0
Silencer VO for Dekton®	V/O Cutting on Dekton®/Porcelain/ Crystallized Glass	•				
Silencer VO for Granite/Quartz Surfaces	V/O Cutting on Granite/Quartz Surfaces	•				
Vetro	Glass, Tile & Stone	0	•		0	•

Alpha® Dry Blades may also be used wet providing the specified RPM is maintained. However, Alpha® Wet Blades may not be used dry with exception of the Alpha® Q-Cut, (QZ4578 and QZ0578). In all cases, it is important that the application meet the defined use for that specific blade. Different sizes are available for various applications. Please refer to the specific product page or our website for additional product information.

PLUS

ULTIMATE DRY BLADE FOR STONE FABRICATORS



- Best Dry Cutting Turbo Blade on the Market
- · Perfect for Granite and Engineered Stone
- 8mm Tall Diamond Layer for a Long Life
- · Recommended for Hard Concrete
- Chip-Free Cutting on Most Demanding Applications

PART NO.	SIZE	THICKNESS	MAXIMUM RPM	ARBOR(S)
DA0478	4"	2.1mm	14,500	7/8", 20mm, 5/8"
DA05A+	4-1/2"	2.1mm	13,200	7/8", 20mm
DA05S	5"	2.1mm	12,200	7/8"
DA06A+	6"	2.1mm	10,100	7/8", 5/8", 🔷
DA07A+	7"	2.3mm	8,400	5/8", ◆
DA08A+	8"	2.3mm	7,400	5/8", ◆
DA09A+	9"	2.3mm	6,600	7/8", 5/8", Quad-W5
DA10A+	10"	2.5mm	5,900	1", 5/8"
DA11A+	10"	2.5mm	5,900	5/8"
DA12A+	12"	2.5mm	6,200	1", 20mm
DA13A+	12"	2.5mm	6,200	20mm

QUAD

ULTIMATE DRY FLUSH CUTTING BLADE



- Requires Quad Drive or Flange Adapter to fit High-Speed Angle Grinder
- · Fits most popular High-speed Angle Grinders
- Specially Designed for Flush Cutting
- · Best Dry Cutting Turbo Blade on the Market
- Chip-Free Cutting on Most Demanding Applications







PART NO.	SIZE	THICKNESS	MAXIMUM RPM	ARBOR(S)
DA04AH	4"	2.1mm	14,500	20mm Quad Drive
DA05SH	5"	2.1mm	12,200	20mm Quad Drive
DA06AH	6"	2.1mm	10,100	20mm Quad Drive
DA07AH	7"	2.3mm	8,400	20mm Quad Drive
DA08AH	8"	2.3mm	7,400	20mm Flange with 8 holes
DA09AH	9"	2.5mm	6,600	20mm Flange with 8 holes
DA11AH	10"	2.5mm	5,900	20mm Flange with 8 holes

ECLIPSE II

HIGH PERFORMANCE DRY BLADE



- High-End General Purpose Turbo Blade for Stone Fabricators
- 8mm tall Diamond Layer for a Long Life
- · Perfect for your Stone Tile Application
- · Consistent Performance without Chipping
- Recommended for Hard Concrete

PART NO.	SIZE	THICKNESS	MAXIMUM RPM	ARBOR(S)
DEE004	4"	2.1mm	14,500	20mm, 5/8"
DEE478	4"	2.1mm	14,500	7/8", 20mm, 5/8"
DEE045	4-1/2"	2.1mm	13,200	7/8", 20mm
DEE005	5"	2.1mm	12,200	7/8"
DEE006	6"	2.1mm	10,100	7/8", 5/8", ◆
DEE007	7"	2.3mm	8,400	5/8", ◆
DEE008	8"	2.3mm	7,400	5/8", ◆→

ECLIPSE Q

HIGH PERFORMANCE DRY FLUSH CUTTING BLADE



- Requires Quad Drive or Flange Adapter to fit High-Speed Angle Grinder
- 8mm tall Diamond Layer for a Long Life
- · Specially Designed for Flush Cutting
- High-End General Purpose Turbo Blade for Stone Fabricators
- · Consistent Performance without Chipping







PART NO.	SIZE	THICKNESS	MAXIMUM RPM	ARBOR(S)	THREADS
DEQ004	4"	2.1mm	14,500	20mm Quad Drive	
DEQ005	5"	2.1mm	12,200	20mm Quad Drive	
DEQ578	5"	2.1mm	12,200	7/8" Quad Drive	
DEQ006	6"	2.1mm	10,100	20mm Quad Drive	
DEQ678	6"	2.1mm	10,100	7/8" Quad Drive	
DEQ007	7"	2.3mm	8,400	20mm Quad Drive	
DEQ008	8"	2.3mm	7,400	20mm Flange with 8 holes	
AAH-7/8		Aluminum Adapter		7/8"	5/8"-11
AAH-20		Aluminum Adapter		20mm	5/8"-11
BAH-5/8		Brass Adapter		20mm	5/8"-11

KATANA

ULTIMATE DRY BLADE FOR ALL TILES



- Tile Installer's Choice for Dry Cutting
- Specially Designed for Hard Porcelain Tile & Sintered Slabs
- Best Dry Cutting Tile Blade with Minimal Chipping

Hybrid Dry Saw Blade for All Tiles





PART NO.	SIZE	THICKNESS	MAXIMUM RPM	ARBOR(S)
DPT478	4"	1.4mm	14,500	7/8", 20mm, 5/8"
DPT115	4-1/2"	1.4mm	13,200	7/8", 20mm
DPT125	5"	1.4mm	12,200	7/8"
DPT150	6"	1.4mm	10,100	7/8", 5/8", 🔷

TUCK POINT

HIGH PERFORMANCE DRY **BLADE FOR TUCK POINTING**



- Virtually Dust-Free Application with Ecoguard W5 and Vacuum
- Formulated for Aggressive Cutting and Long Life
- Best Tuck Pointing Blade on the Market
- Reliable Proven Performer



PART NO.	SIZE	THICKNESS	MAXIMUM RPM	ARBOR(S)
TP0478	4"	6mm	14,500	7/8", 5/8"

LIBERO

ULTIMATE DRY BLADE FOR MARBLE



- · Specially Designed for Marble and Limestone
- · Recommended for Onyx
- Highest Quality Diamond Edge for Chip-Free Cutting
- · Best Dry Cutting Electroplated Blade on the Market
- Precise Cutting Performance on Softer Stone

PART NO.	SIZE	THICKNESS	MAXIMUM RPM	ARBOR(S)
DL0478	4"	0.8mm	14,500	7/8", 20mm, 5/8"
DL05A+	4-1/2"	0.8mm	13,200	7/8", 20mm
DL05S	5"	1.0mm	12,200	7/8"
DL06A+	6"	1.2mm	10,100	7/8", 5/8", 🝑
DL07A+	7"	1.4mm	8,400	5/8", ◆>

TRIM MASTER

DRY BLADES FOR MITER SAWS



- 8mm tall Diamond Layer for a Long Life
- · Great for Back Splash Cutting
- Perfect for Granite and Engineered Stone
- · Best Dry Cutting Blade for Miter Saw
- Consistent Performance with Ease of Operation





PART NO.	SIZE	THICKNESS	MAXIMUM RPM	ARBOR(S)
TM10A+	10"	2.2mm	5,900	5/8"
TM12A+	12"	2.5mm	6,200	1", 5/8"

ULTRACUT GPM SERIES

VACUUM-BRAZED DIAMOND BLADE



- · Cuts most materials without chipping or cracking
- Maintains excellent cutting performance at the maximum cutting depth
- Cuts Engineered Stone, Marble, Limestone, Angle Iron, Pipe, Electrical Conduit, Re-Bar, Metal Stud, Structural Metal, Sheet Metal, Grid, and Stainless Steel, Wood, Plastics, Composite Materials, Masonry and Concrete
- Fits on most popular hand-held electric power tools
- Available in 4", 4-1/2", 5", 6", 7", 8" and 9"

PART NO.	SIZE	THICKNESS	MAXIMUM RPM	ARBOR(S)
GPM0420	4"	1.5mm	14,500	20mm, 5/8"
GPM4578	4-1/2"	1.5mm	13,200	7/8", 20mm
GPM0578	5"	1.5mm	12,200	7/8"
GPM06UN	6"	1.9mm	10,100	7/8", 5/8", �
GPM07UN	7"	1.9mm	8,400	7/8", 5/8", 🔷
GPM08UN	8"	1.9mm	7,400	7/8", 5/8", 🔷
GPM0978	9"	2.2mm	6,600	7/8", 5/8", Quad-W5

ULTRACUT APR SERIES

HYBRID BLADE FOR INTRICATE & FLUSH CUTTING



- Unique Design for Flush Cutting Applications
- Removes Anchor Bolts, Concrete Re-Bar and Pipe From Floors and Walls
- Great for Building Contractors and Fabricators Who Work with Metal and Composite Materials
- Accepts Alpha® Exclusive Quad Drive Adapter for Mounting On Angle Grinders for "Flush Cutting"
- Available in 4-1/2", 5" and 7"





PART NO.	SIZE	THICKNESS	MAXIMUM RPM	ARBOR(S)	THREADS
APR45QA	4-1/2"	1.7mm	13,200	20mm, Quad Drive	
APR05QA	5"	1.7mm	12,200	20mm, Quad Drive	
APR07QA	7"	1.9mm	8,400	20mm, Quad Drive	
BAH-5/8			Brass Adapter	20mm	5/8"-11
AAH-20			Aluminum Adapter	20mm	5/8"-11

LAMINAM®

RECOMMENDED BLADE FOR CUTTING LAMINAM



- Specially Designed for Laminam[®] By Crossville[®]
- Chip-Free Cutting On Thin Porcelain Tile/Panels
- Smooth Continuous Diamond Rim and Bond Hardness Best Suited for Glass Materials
- · High-Quality Straight and True Cuts
- Excellent Choice for Plunge Cutting, Trimming Near The Edges and for Cutting An Internal Radius
- Wet/Dry Use



PART NO.	SIZE	THICKNESS	MAXIMUM RPM	ARBOR(S)
LM0438	4-3/8"	1.0mm	13,200	7/8", 20mm

DRESSING STICK



- Designed To Expose New Cutting Surfaces or Re-Open Glazed Diamond Blades and Grinding Wheels
 - Removes Sinter Bond From Cutting Edge
 - Can Be Used To Ease Sharp Corners
- · Bond Type: Silicon Carbide

PART NO.	SIZE	GRIT
290006	8" x 1.5" x 1.5"	60

PORCELLANA

ULTIMATE WET BLADE FOR PORCELAIN TILES



- 3/8" (10mm) Tall Diamond Layer for Long Life
- Tile Installer's Choice for Chip Free Wet Cutting
- Recommended for Granite, Marble, Porcelain, Engineered Stone, Travertine and Ceramic Tiles
- · Best Wet Cutting Tile Blade on the Market
- · Hybrid Wet Saw Blade for All Tiles
- · Wet Use Only

PART NO.	SIZE	THICKNESS	MAX RPM	ARBOR(S)	FOR USE ON
PT04A+	4-3/8"	1.4mm	13,200	7/8", 20mm	Stone Cutter/Angle Grinder
PT05S	5"	1.4mm	12,200	7/8"	Stone Cutter/Angle Grinder
PT07A+	7"	1.6mm	8,400	5/8"	Tile Saw
PT08A+	8"	1.6mm	7,400	5/8"	Tile Saw
PT10A+	10"	1.6mm	5,900	5/8"	Tile Saw
PT0801	8"	1.6mm	7,400	1", 7/8", 5/8"	Portable Rail Saw
PT1001	10"	1.6mm	7,400	1", 7/8", 5/8"	Portable Rail Saw

VETRO

ULTIMATE WET BLADE FOR GLASS TILES



- · Best Wet Cutting Glass Blade on the Market
- · Designed for Chip-Free Cutting
- Tile Installer's Choice for Glass Tile
- Chip-Free Cutting on Most Demanding Applications
- Wet Use Only

PART NO.	SIZE	THICKNESS	MAX RPM	ARBOR(S)	FOR US ON
WG0438	4-3/8"	1.0mm	13,200	7/8", 20mm	Stone Cutter
WG0700	7"	1.6mm	8,400	5/8"	Tile Saw
WG0800	8"	1.6mm	7,400	5/8"	Tile Saw
WG1000	10"	1.6mm	5,900	5/8"	Tile Saw
WG1001	10"	1.6mm	5,900	1", 5/8"	Portable Rail Saw

Q-CUT

THE ULTIMATE WET BLADE FOR QUARTZITE/GRANITE TILE



- Formulated To Cut Hard Tiles Such As Quartzite/Granite
- Tile Installer's Choice for Stone Tile
- Designed for Fast, Precision Chip-Free Cutting
- · Perfect for 2cm Porcelain Paver Tile
- Wet Use Only (Except for 4-1/2" and 5" Blades Can Be Used Wet or Dry)



PART NO.	SIZE	THICKNESS	MAXIMUM RPM	ARBOR(S)
QZ4578	4-1/2"	1.6mm	13,200	7/8", 20mm
QZ0578	5"	1.6mm	12,200	7/8"
QZ0658	6"	1.4mm	10,100	7/8", 5/8", 🔷
QZ0758	7"	1.6mm	8,400	5/8"
QZ0858	8"	1.6mm	7,400	5/8"
QZ0978	9"	2.1mm	6,600	7/8", Quad-W5
QZ1058	10"	2.0mm	5,900	5/8"
QZ1001	10"	2.0mm	5,900	1", 5/8"
QZ1201	12"	2.1mm	6,200	1"

CORDLESS SAW BLADE

WET/DRY SAW BLADE FOR CERAMIC TILE



- Can Be Used Wet or Dry
- · Ideal for Switch Box Cut-Out and Trimming
- Perfect for Ceramic and Stone Tiles
- Specially Designed for Cordless Saw
- · Chip-Free Wet/Dry Cutting for Tile
- · Cordless Saw Blade for Tile

PART NO.	SIZE	THICKNESS	MAXIMUM RPM	ARBOR(S)
BT03AL	3-3/8"	1.2mm	1,500	15mm
-		wwet/dry • • • • • • • • • • • • • • • • • • •	Cordioss Save Blade Part No. PTSAL Part No. PTSAL Part No. To Air Part No. To	1

CORDLESS SAW BLADE

WET SAW BLADE FOR GLASS



- · Wet Use Only
- · Ideal for Switch Box Cut-Out and Trimming
- · Perfect for Mirror, Glass and Glass Tile
- Specially Designed for Cordless Saw
- Chip-Free Wet Cutting for Glass Tile and Sheet Glass
- Cordless Saw Blade for Glass

PART NO.	SIZE	THICKNESS	MAXIMUM RPM	ARBOR(S)
BG03AL	3-3/8"	0.9mm	1,500	15mm



VORTEX

INTRICATE & FLUSH CUTTING BLADE FOR GRANITE



- Requires Quad Drive to fit High-Speed Angle Grinder
- · Perfect for Granite and Engineered Stone
- · Specially Designed for Flush Cutting
- · Stone Fabricator's Choice
- Chip-Free Cutting on Most Demanding Applications
- Side Protection Segments Help Cutting Straight





PART NO.	SIZE	THICKNESS	MAXIMUM RPM	ARBOR(S)	THREADS
FCD40AH	4"	2.5mm 14,500 20mm Quad Drive			
FCD50AH	5"	2.5mm	12,200	20mm Quad Drive	
AAH-20	Aluminum Adapter			20mm	5/8"-11
BAH-5/8	Brass Adapter		20mm	5/8"-11	

VORTEX

INTRICATE & FLUSH CUTTING BLADE FOR MARBLE



- Requires Quad Drive to fit High-Speed Angle Grinder
- Specially Designed for Marble and Lime Stone
- · Specially Designed for Flush Cutting
- Stone Fabricator's Choice
- Chip-Free Cutting on Most Demanding Application











PART NO.	SIZE THICKNESS		MAXIMUM RPM	ARBOR(S)	THREADS
FCM50AH	5"	5" 1.6mm 12,200		20mm Quad Drive	
AAH-20	Aluminum Adapter			20mm	5/8"-11
BAH-5/8	Brass Adapter			20mm	5/8"-11

CONTOUR

CURVE CUTTING BLADE FOR PORCELAIN/CRYST. GLASS



- Designed Specifically for Cutting Porcelain and Sintered Slabs
- Fits On Wet/Dry Stone Cutters
- Cuts Curved Areas Cleanly, Accurately and Safely While Allowing A Wider Kerf
- Direct Sintered Diamond Segments On Steel Core Prevents Undercutting
- · Can Be Used Either Wet or Dry

PART NO.	SIZE	THICKNESS	MAXIMUM RPM	ARBOR(S)	DEPTH OF CUT
CCP004	4"	4.0mm	14,500	7/8"	3/4"
CCP045	4-1/2"	4.0mm	13,200	7/8"	3/4"
CCP005	5"	4.0mm	12,200	7/8"	1-1/4"

CONTOUR

CURVE CUTTING BLADE FOR GRANITE AND ENG. STONE



- · Specifically Developed for Cutting Granite Sinkholes
- · Best Seller for Sinkhole Application
- Works Very Well On Engineered Stone, Quartzite and Harder Types of Natural Stone
- Cuts Curved Areas Cleanly, Accurately and Safely While Allowing A Wider Kerf
- Fits on Wet/Dry Stone Cutters
- Direct Sintered Diamond Segments On Steel Core Prevents Undercutting
- · Fits On CNC Router with Cutting Head
- · Can Be Used Either Wet or Dry

PART NO.	SIZE	THICKNESS	MAXIMUM RPM	ARBOR(S)	DEPTH OF CUT
CCB004	4"	4.0mm	14,500	7/8"	3/4"
CCB045	4-1/2"	4.0mm	13,200	7/8"	3/4"
CCB005	5"	4.0mm	12,200	7/8"	1-1/4"
CCB006	6"	4.0mm	10,100	7/8"	1-5/8"

HOT-ROD

CHANNEL CUTTING BLADE FOR GRANITE MARBLE & PORCELAIN




- Perfect for Channel Cutting with Wet/Dry Stone Cutters
- · Great for Grout Removal with Ecocutter
- · Perfect to Cut Anti-Slip Grooves and Water Drip
- Reliable Proven Performer
- · Can Be Used Wet or Dry







GROUT WIDTH



PART NO.	SIZE	THICKNESS	MAXIMUM RPM	ARBOR(S)	RECOMENDED FOR
HP03A+	3"	6.0mm	14,500	7/8", 20mm	Porcelain
HA03A+	3"	7.0mm	14,500	7/8", 20mm	Porcelain
HT03A+	3"	4.2mm	14,500	7/8", 20mm	Granite/Quartz Surfaces
HQ03A+	3"	5.5mm	14,500	7/8", 20mm	Granite/Quartz Surfaces
HR03A+	3"	7.0mm	14,500	7/8", 20mm	Granite/Quartz Surfaces
HW03A+	3"	11.5mm	14,500	7/8"	Granite/Quartz Surfaces
HS03A+	3"	4.75mm	14,500	7/8", 20mm	Marble
HM03A+	3"	6.5mm	14,500	7/8", 20mm	Marble
HT04A+	4"	4.2mm	14,500	7/8", 20mm	Granite/Quartz Surfaces
HR04A+	4"	7.0mm	14,500	7/8", 20mm	Granite/Quartz Surfaces

MASONMASTER

PERFECT FOR HARDSCAPE APPLICATIONS



- Excellent General Purpose Blade for High-Speed Demolition & Masonry Saws
- Most Popular for Hardscapers, General Contractors & Masons
- · Laser-Welded Segments for Fast Cutting and A Long Life
- Can Be Used Wet or Dry

PART NO.	SIZE	THICKNESS	MAXIMUM RPM	ARBOR(S)
MM00912	9"	2.5mm	6,600	7/8", Quad-W5
MM01212	12"	3.0mm	6,200	1", 7/8", 20mm w/pin hole
MM01412	14"	3.2mm	5,360	1", 7/8", 20mm w/pin hole
MM01612	16"	3.2mm	4,700	1", 7/8", 20mm w/pin hole

RESCUE

DEMOLITION BLADE CUTS IT ALL



- · Slices Through Materials with Ease
- Works on Concrete with Re-Bar, Steel, Stone, Metal, Wood, Glass and Rubberized Materials
- Proven Winner for Firefighters, Police Officers and Construction Professionals
- Use on Gas-Powered Cut-Off Saws
- Available in 9", 12" and 14" Diameters

PART NO.	SIZE	THICKNESS	MAXIMUM RPM	ARBOR(S)
RB09A+	9"	2.8mm	8,300	7/8", Quad-W5
RB12A+	12"	3.0mm	6,200	1", 7/8", 20mm w/Pin Hole
RB14A+	14"	3.2mm	5,360	1", 7/8", 20mm w/Pin Hole











QUAD-W ADAPTERS

DESIGNED FOR WET CUTTING WITH FOUR / FIVE MOUNTING HOLES

Designed with Four Mounting Holes for Blades with 7/8" Arbors





- · Made of Durable High-Quality Aluminum
- · Distribute Water to the Cutting Edge on Both Sides of the Blade
- · Comes with All Necessary Mounting Parts

PART NO.	TYPE	ARBOR(S)	THREADS
QUAW058	4-Hole Aluminum Adapter	7/8"	5/8"-11
QUAWM14	4-Hole Aluminum Adapter	22mm	M14-2
QUAW5058	5-Hole Aluminum Adapter	7/8"	5/8"-11
QUAW5M14	5-Hole Aluminum Adapter	22mm	M14-2

QUAD ADAPTERS





- Made Of Durable High-Quality Brass or Aluminum
- Easily Mounted To Any Quad Drive Blade
- · Available in Various Thread Sizes



PART NO.	TYPE	ARBOR(S)	THREADS
AAH-7/8	Aluminum	7/8"	5/8"-11
AAH-20	Aluminum	20mm	5/8"-11
BAH-5/8	Brass	20mm	5/8"-11

FLANGE ADAPTERS



- Designed for Blades That Are Eight Inches or Larger with Eight Mounting Holes
- Made Of Durable High-Quality Steel
- Easily Mounted To Any Large Flush Cutting Blade
- Available in 5/8"-11 and M14-2 Thread Sizes

PART NO.	TYPE	THREADS
FAH-5/8	Adapter	5/8"-11
FAH-M14	Adapter	M14-2

DIAMOND BLADE RE-DRESSING TOOL



- Designed To Redress Dull Cutting Edges Of Diamond Blades From 4" To 6" Using an Angle Grinder
- Can Be Used With All Small Angle Grinders Up To 6"
- Virtually Dust-Free Application When Used With HEPA Vacuum To Minimize Silica Exposure
- Prevents Kick-Back For Safe And Easy Operation
- Comes With a 3 Pack of Grinding Wheels That Can Redress 30 To 50 Dull Blades
- ONLY Redressing Tool Available For Small Diameter **Diamond Blades**





PART NO.	SIZE	THICKNESS	MAXIMUM RPM	ARBOR(S)	GRIT	DESCRIPTION
DRT0500	5" (125mm)			5/8"-11		Diamond Blade Redressing Tool
DRT3520	5" (125mm)	3/4" (20mm)	5,000	5/8"-11	46 (3pk)	Aluminum Oxide / Hardness T

PULL-TO-CUT SHROUD KITS

PREMOVES DUST FOR DRY **PULL-TO-CUT METHOD**



- Designed To Remove Dust When Using Pull-To-Cut Method
- Can Be Used Easily With Minimal Alterations
- Fits On Most Popular 4-1/2", 5" & 6" High-Speed Grinders
- Great For Use With A HFPA Vacuum
- Kit Includes: Safety Guard, Dust Shroud Assembly, Universal Dust Hose, Plastic Collar, Stainless Steel Collar, Hook & Loop Tie, Hex Wrench (6mm)



GUIDE RAILS

CREATES STRAIGHT CUTS EVERYTIME



- Works Great When Used with A Carriage Assembly
- Must-Have Accessory for Wet/Dry Stone Cutters and Beveling Auxiliary Base
- Complete System Makes Precision Cutting Fast and Easy
- Perfect for Miter Cutting for Laminated Waterfall Edge

PART NO.	SIZE	FOR USE WITH	DESCRIPTION
ASC-GR04	4' (1.2m)		Guide Rail with 2 Clamps
ASC-GR07	7' (2.1m)		Guide Rail with 2 Clamps
ASC-GR012	12' (3.6m)		Guide Rail (2-6' pcs) with 2 Clamps, Connector & 4 Screws
ASC-GRKIT	Set		Guide Rail Bundle (3 Rails (4',7',12'), 6 Clamps, Connector & 4 Screws)
GR-AGCT	12" (0.3m)		Guide Rail Connector w/4 Screws (M8x20) for 12' Rails
ECO-CAM		ECC-125	Ecocutter Carriage Assembly
ASC-5CSM	5"	ESC-125	Guide Rail Carriage Assembly
ASC-6CSM	6"	PSC-150 / ESC-150	Guide Rail Carriage Assembly
BAB-CASM		BAB1590	Carriage Assembly for Beveling Base







EZ THIN TILE CUTTERS

FAST AND ACCURATE CUTTING TOOLS



- Tungsten-Carbide wheel on a Tungsten-Carbide axle provides the cleanest score and a long, wobble-free life
- Shaped and tapered clear plastic handle with profiled grip is ideal for tile contractors, artists, and craftsmen

aftsmen
Part No. KOC305B





- The smooth-running, fast-cutting, easy-touse manual glass cutter for sheet glass or thin panel materials
- Highly adaptable and quickly adjusts for odd-sized pieces as well as low maintenance and long service life
 - Makes perfect parallel cut to the guide edge with little effort



EZ GLASS RUNNING PLIERS

 Lightweight aluminum plier can be used on various



thicknesses of glass from 5mm to 12mm

- Off-set handle provides clean and quick breaks
- The high-density plastic jaws will not chip or mark your glass





PART NO.	PART NO. RECOMMENDED FOR DESCRIPTION	
KEC-600	Up to 24"	EZ Thin Panel T-Cutter 24"
KEC-1500	Up to 60"	EZ Thin Panel T-Cutter 60"
KOC305B	Straight Cuts	EZ Slimline Oil Cutter
KOC512P	Thickness 5mm to 12mm	EZ Glass Running Plier
5480-1700		EZ Thin Cutter Starter Kit (inc. 24" T-Cutter, Slimline Oil Cutter, Plier & Oil)
KOC1000	EZ Tile Cutter Lubricant	EZ Cutter Oil - 8oz. (237ml)

PROFILER B-SERIES

CREATES PERFECT DEMI-BULLNOSE EDGE



- Use On Granite, Engineered Stone, Marble, Concrete, Crystallized Glass, Porcelain Slabs and Sintered Slabs
- Create A Perfect Demi-Bullnose/Roundover Edge Treatment
- Nylon Guide and Rotary Touchier Assures The Proper Depth Of Cut Is Achieved
- Equipped with A 5/8"-11 Female Thread and Internal Water Passage Holes
- Fits On All Popular Water-Fed Polishers



Demi-Bullnose



PART NO.	SIZE	MAXIMUM RPM	THREADS	SHAPE
PFB051	3/16" (0.5cm)	3,500	5/8"-11	Demi-Bullnose
PFB101	3/8" (1.0cm)	3,500	5/8"-11	Demi-Bullnose
PFB131	1/2" (1.3cm)	3,500	5/8"-11	Demi-Bullnose
PFB201	3/4" (2.0cm)	3,500	5/8"-11	Demi-Bullnose
PFBNG02B	Fits All S	izes of Profilers	Nylon (Guide

PROFILER V-SERIES

CREATES PERFECT BULLNOSE EDGE



- Create A Perfect Bullnose/Roundover Edge Treatment
- Use On Granite, Engineered Stone, Marble, Limestone, Concrete, Crystallized Glass, Porcelain and Sintered Slabs
- Eliminate The Time-Consuming Calibration Process for Seamed Pieces
- Nylon Guide and Rotary Touchier Assures The Edges Are Uniform
- Equipped with A 5/8"-11 Female Thread and Internal Water Passage Holes
- Fits On All Popular Water-Fed Polishers



Full Bullnose

PART NO.	SIZE	MAXIMUM RPM	THREADS	SHAPE
PFV201	3/4" (2cm)	3,500	5/8"-11	Full Bullnose
PFV301	1-1/4" (3cm)	3,500	5/8"-11	Full Bullnose
PFV401	1-1/2" (4cm)	3,500	5/8"-11	Full Bullnose
PFV501	2" (5cm)	6,000	5/8"-11	Full Bullnose
PFV601	2-3/8" (6cm)	6,000	5/8"-11	Full Bullnose
PFBNG02B	Fits All Sizes of Profilers		Nylon G	uide

PROFILER Z-SERIES

PERFECT 90-DEGREE EDGE GRINDING



- Vertical Grinding On All Types Of Materials
- Never Loses Shape for True Zero Tolerance
- Nylon Guide and Rotary Touchier Assures Uniformity
- Equipped with A 5/8"-11 Female Thread and Internal Water Passage Holes
- Fits On All Popular Water-Fed Polishers



Straight Edge

PART NO.	SIZE	MAXIMUM RPM	THREADS	SHAPE
PFZ301	1-1/4" (3cm)	3,500	5/8"-11	Straight
PFZ401	1-1/2" (4cm)	3,500	5/8"-11	Straight
PFZ501	2" (5cm)	6,000	5/8"-11	Straight
PFBNG02B	Fits All S	izes of Profilers	Nylon Gu	iide

SPIKE DISC

COATING REMOVAL MADE EASY




- Designed for Thick Coating Removal of Epoxy, Urethane, Glue and Adhesives
- Unique Open-Mesh Layout Reduces Clogging and Heat Build-Up
- Optimized Diamond Grits Provide A Consistent Performance
- Sandwiched-Rubber Cushioned Light-Weight Body Reduces Noise and Vibration
- Each Diamond Bead Has Multiple Diamond Grits To Maintain A Sharp Cutting Capability for A Long Time
- Can Be Used On Wood, Glass Fiber Reinforced Polymer and Carbon Fiber Reinforced Polymer.
- Available in 4-1/2", 5" and 7" with 7/8" Arbor or with 5/8"-11 Zinc Hub
- Combine with The Ecoguard G for A Virtually Dust-Free Solution

PART NO.	SIZE	MAXIMUM RPM	ARBOR(S)	GRIT
VCS4535	4-1/2"	13,200	7/8"	35
VCS453H	4-1/2"	13,200	5/8"-11	35
VCS4550	4-1/2"	13,200	7/8"	50
VCS455H	4-1/2"	13,200	5/8"-11	50
VCS5035	5"	13,200	7/8"	35
VCS503H	5"	12,200	5/8"-11	35
VCS5050	5"	12,200	7/8"	50
VCS505H	5"	12,200	5/8"-11	50
VCS7035	7"	8,400	7/8"	35
VCS703H	7"	8,400	5/8"-11	35
VCS7050	7"	8,400	7/8"	50
VCS705H	7"	8,400	5/8"-11	50



close-up of diamonds





sandwich construction

SURFACE GRINDING

VEXTRA FLAT DISC

GENERAL PURPOSE FLAT GRINDING DISC



- Can Be Used On Natural Stones, Engineered Stone/ Quartz Surface, Wood and Rubber
- Optimized Diamond Grits for Consistent Performance
- Sandwich Construction Reduces Noise and Vibration
- Available in 4-1/2", 5" and 7" with 7/8" Arbor or with 5/8"-11 Zinc Hub
- Works Well When Eliminating Epoxy, Glues and Adhesives

PART NO.	SIZE	MAXIMUM RPM	ARBOR(S)	GRIT
VDD4535	4-1/2"	13,200	7/8"	35
VDD453H	4-1/2"	13,200	5/8"-11	35
VDD455H	4-1/2"	13,200	5/8"-11	50
VDD4580	4-1/2"	13,200	7/8"	80
VDD5035	5"	12,200	7/8"	35
VDD503H	5"	12,200	5/8"-11	35
VDD5050	5"	12,200	7/8"	50
VDD505H	5"	12,200	5/8"-11	50
VDD5080	5"	12,200	7/8"	80
VDD508H	5"	12,200	5/8"-11	80
VDD7035	7"	8,400	7/8"	35
VDD703H	7"	8,400	5/8"-11	35
VDD7050	7"	8,400	7/8"	50
VDD705H	7"	8,400	5/8"-11	50
VDD7080	7"	8,400	7/8"	80
VDD708H	7"	8,400	5/8"-11	80





open-mesh

sandwich construction

VEXCEL RIGID DISC

GENERAL PURPOSE RIGID GRINDING DISC



- Designed for Heavy-Duty Material Removal Applications
- Robust Diamond Grits for Maximum Performance
- Fluoric Rubber Backing To Reduce Noise and Vibration
- Very Aggressive and A Long Life
- Use on Granite, Engineered Stone, Quartzite, Marble, Concrete and Sintered Slabs

PART NO.	SIZE	MAXIMUM RPM	ARBOR(S)	GRIT
VDR4525	4-1/2"	13,200	7/8"	25
VDR452H	4-1/2"	13,200	5/8"-11	25
VDR4535	4-1/2"	13,200	7/8"	35
VDR453H	4-1/2"	13,200	5/8"-11	35
VDR4550	4-1/2"	13,200	7/8"	50
VDR455H	4-1/2"	13,200	5/8"-11	50
VDR4580	4-1/2"	13,200	7/8"	80
VDR458H	4-1/2"	13,200	5/8"-11	80
VDR5025	5"	12,200	7/8"	25
VDR502H	5"	12,200	5/8"-11	25
VDR5035	5"	12,200	7/8"	35
VDR503H	5"	12,200	5/8"-11	35
VDR5050	5"	12,200	7/8"	50
VDR505H	5"	12,200	5/8"-11	50
VDR5080	5"	12,200	7/8"	80
VDR508H	5"	12,200	5/8"-11	80
VDR7025	7"	8,400	7/8"	25
VDR702H	7"	8,400	5/8"-11	25
VDR7035	7"	8,400	7/8"	35
VDR703H	7"	8,400	5/8"-11	35
VDR7050	7"	8,400	7/8"	50
VDR705H	7"	8,400	5/8"-11	50
VDR7080	7"	8,400	7/8"	80
VDR708H	7"	8,400	5/8"-11	80







sandwich construction

VFLEX SANDING DISC

GENERAL PURPOSE FLEXIBLE SANDING DISC



- Perfect for paint, coating, oxide and rust removal, grinding burr and chamfering on the edge of steel, stainless steel and contoured surfaces
- For use on: Stone, Ceramic & Composite Materials
- Flexible Sandwich Construction Reduces Noise and Vibration
- Ideal for Shaping Natural/Engineered Stone and Glass
- Available in 5' and 7" with 7/8" arbor or with 5/8"-11 zinc hub

PART NO.	SIZE	MAX RPM	ARBOR(S)	GRIT
VDF5035	5"	5,000	7/8"	35
VDF503H	5"	5,000	5/8"-11	35
VDF5050	5"	5,000	7/8"	50
VDF505H	5"	5,000	5/8"-11	50
VDF5080	5"	5,000	7/8"	80
VDF508H	5"	5,000	5/8"-11	80
VDF7035	7"	5,000	7/8"	35
VDF703H	7"	5,000	5/8"-11	35
VDF7050	7"	5,000	7/8"	50
VDF705H	7"	5,000	5/8"-11	50
VDF7080	7"	5,000	7/8"	80
VDF708H	7"	5,000	5/8"-11	80





SANDPAPER

CONCRETE AND MARBLE POLISHING



- Waterproof Hook and Loop Backed Silicon Carbide Abrasive
- Use On Marbles and Softer Types of Natural Stone
- Can Also Be Used To Polish Glass, Metal and Wood
- Very Adaptable To Onsite Work and Easy To Use
- · Resists Clogging When Used Wet
- · Can Be Used Wet or Dry







HOOK A	ND LOOP	4"	5"
GRIT	QUANTITY	PART NO.	PART NO.
80	50	MP40080	MP50080
120	50	MP40120	MP50120
240	50	MP40240	MP50240
320	50	MP40320	MP50320
400	50	MP40400	MP50400
500	50	MP40500	MP50500
600	50	MP40600	MP50600
Assortment	50	MP40KIT	MP50KIT




Alpha® Ceramica is a three-part system for polishing granite, hard marble and porcelain. Utilizing the best grade industrial diamonds and the best bond materials, Alpha® Ceramica is sure to provide the best possible finish on your polished stone. Alpha® Ceramica EX augments the Ceramica line allowing the fabricator to polish a variety of different materials such as engineered stone, quartz surfaces, marble, porcelain and granite.

oart 1

Ceramica Vitrified and Ceramica Metal

Long lasting and aggressive design.

Rigid or flexible depending upon application requirements. Use for light shaping work, smoothing and preparing for the polishing process.





Ceramica Resin and Ceramica EX

Fine grade diamonds are heat sintered in a hard resin bond within a flexible matrix.

Each grit covers the previous grit, and through the process closes the pores for a natural polish.

After the last grit, a solid natural polish is achieved.

Durability

Flexibility

Cutting

part 2

HR

HR

HR

<u>ent</u> 8

Ceramica Buff

Super fine abrasive disc that brings out a deep glossy reflection with a mirror finish.

Use in place of messy polishing powders and dangerous chemicals for final polishing.



HR

APPLICATION	VITRIFIED	RESIN	METAL	PE
Ogee Edge	NR	R	HR	
Undermount Sink Hole	NR	R	HR	
Inside Corners	NR	R	HR	
Bullnose	HR	R	R	

POLISHING AREAS	VITRIFIED	RESIN	METAL
Concave	R	HR	HR
Convex	HR	R	R
Flat	R	NR	HR

Alpha® Ceramica is designed for a variety of applications and can be used in the polishing shop at the job site. A long time standard in the fabrication area, there are no other systems with the same capability for a deep gloss finish.

HR

R

HR

KEY: HR = Highly Recommended

R = Recommended

NR = Not Recommended

CERAMICA VITRIFIED

PREPARATION STAGE FOR WET GRANITE POLISHING



- Designed To Handle The Hard Job of Removing Saw and Grinding Marks
- Ideal for The Bullnose or Profiled Edge
- Fabricators Love The Aggressiveness, Ease of Use and Long Life
- Excellent Results On A Consistent Basis
- Available in Grits of 60, 150 and 300
- · Cost-Effective Investment






ноок	AND LOOP	3"	4"	5"
GRIT	COLOR	PART NO.	PART NO.	PART NO.
60	Blue	GP30060V	GP40060V	GP50060V
150	Yellow	GP30150V	GP40150V	GP50150V
300	Orange	GP30300V	GP40300V	GP50300V

CERAMICA METAL

PREPARATION STAGE FOR WET GRANITE POLISHING



- Best Combination with Aggressive Cutting Performance and Flexibility
- Designed for Polishing Harder Types of Natural Stone
- Discs Have The Hardness of A Metal Bond Diamond in A Flexible Resin Bond Disc
- Superior Aggressiveness Compared To Standard Resin Bond Discs
- Polishes in Tight, Difficult To Reach Areas Such As Internal Corners and Inside Rim of Sink Holes
- · Consistent Performance and A Long Life
- Available in Grits of 60, 150 and 300





CERAMICA RESIN

ULTIMATE POLISHING PADS FOR GRANITE



 High-Performance Discs Provide The Best Possible Polish

Extremely Flexible with Consistent Performance

- · Best in The Industry and Very Cost-Effective
- · Designed for Wet Granite Hand Polishing
- Fabricators Achieve Excellent Results Consistently
- Works Extremely Well in Tight Curved Areas Such As Inside Sinkholes
- Available in 3", 4" and 5" Size Discs


HOOK AN	HOOK AND LOOP		4"	5"
GRIT	COLOR	PART NO.	PART NO.	PART NO.
150	Yellow	GP30150R	GP40150R	GP50150R
300	Orange	GP30300R	GP40300R	GP50300R
500	Red	GP30500R	GP40500R	GP50500R
1000	Dark Green	GP31000R	GP41000R	GP51000R
2000	Light Green	GP32000R	GP42000R	GP52000R
3000	Brown	GP33000R	GP43000R	GP53000R

CERAMICA BUFF

ULTIMATE WET GRANITE FINAL POLISHING



- · Produces A Superior Glossy Finish
- Available in Black for Dark Stones and White for Light Colored Stones
- · Small Amount of Water Required
- Consistent Performer for Professional Quality
- Hook & Loop Backed
- Use On Popular Hand-Held Wet Polishers
- Available in 3", 4" and 5"
- Favorite of Fabricators, Monumentalists and Tile Contractors







CERAMICA EX

WET POLISHING FOR ALL STONES



- · Produces A High-Quality Shine
- Polishes On All Materials
- Ideal for Polishing Inside Corners and A Tight Radius
- Works Very Well On Tough Materials Including Tough To Polish Black and Green Marbles
- Extremely Flexible



HOO	K AND LOOP	3"	4"	5"
GRIT	COLOR	PART NO.	PART NO.	PART NO.
200	Yellow	EX30200R	EX40200R	EX50200R
500	Red	EX30500R	EX40500R	EX50500R
1000	Dark Green	EX31000R	EX41000R	EX51000R
2000	Light Green	EX32000R	EX42000R	EX52000R
3000	Brown	EX33000R	EX43000R	EX53000R
ALL	Assortment (1 each)	_	EX40KIT	_

CERAMICA TF

FOR TEXTURED FINISH



- Create Textured Finishes On Engineered Stone/ Quartz Surfaces
- Extremely Flexible Disc Reaches Tight Corners Comfortably
- Hook & Loop Backed for Quick Grit Changes
- Use On Popular Hand-Held Wet Polishers










PART NO.	SIZE	TYPE	GRIT	COLOR
TFR4000	4"	Hook & Loop	Pos. 0	Orange
TFR4001	4"	Hook & Loop	Pos. 1	Red
TFR4002	4"	Hook & Loop	Pos. 2	Dark Green
TFR4003	4"	Hook & Loop	Pos. 3	Light Green
TF40KIT	4"	Hook & Loop	1 each	Assortment

KIRARA PADS

EASY THREE-STEP MAINTENANCE SYSTEM



- Restore The Polish Of Marble, Limestone & Concrete Surfaces
- Great for Difficult To Polish Marble and Limestone, Such As Nero Maguina (Black Marble)
- Fast, Consistent, High-Quality Results
- Easy 3-Step Maintenance System
- Minimal Water Needed When Used Wet
- Can Be Used On A Typical Floor Buffers with 175 RPM or 300 RPM

PART NO.	SIZE	MAX RPM	TYPE	RECOMMENDEDFOR	GRIT	COLOR
KWD4001	4"	4,000	Hook & Loop	Marble/Limestone/ Concrete	Pos 1	Red
KWD4002	4"	4,000	Hook & Loop	Marble/Limestone/ Concrete	Pos 2	Light Green
KWD4003	4"	4,000	Hook & Loop	Marble/Limestone/ Concrete	Pos 3	Blue



CERAMICA DRY

DRY POLISHING FOR NATURAL STONES




- Dry Polish All Natural Stones and Cement-Based Composites
- · For Use On Sanders and Polishers
- Thick Diamond Layer for Better Quality Results
- Hook & Loop Backed for Quick Grit Changes
- Use On Popular Hand-Held Wet Polishers



PART NO.	SIZE	MAX. RPM	TYPE	GRIT	COLOR
CD40060R	4"	4,500	Hook & Loop	60	Blue
CD40200R	4"	4,500	Hook & Loop	200	Yellow
CD40500R	4"	4,500	Hook & Loop	500	Red
CD41000R	4"	4,500	Hook & Loop	1000	Dark Green
CD42000R	4"	4,500	Hook & Loop	2000	Light Green
CD43000R	4"	4,500	Hook & Loop	3000	Brown
CD40KIT	4"	4,500	Hook & Loop	1 each	Assortment

HAND PADS

HAND POLISHING PADS



- · Convenient, On-Site Polishing, On Materials
- Use On Glass, Ceramics, Marble, Granite, Porcelain, Concrete, Terrazzo and Quartz Surfaces
- Two Bond Types To Provide The Best Possible Finish
- Available in Electroplated and Resin Grits
- · Can Be Used Wet or Dry



PART NO.	GRIT	COLOR	BOND TYPE
DHP0060	60	Blue	Electroplated
DHP0150	150	Yellow	Electroplated
DHP0300	300	Orange	Electroplated
DHP0500	500	Red	Electroplated
DHP1000	1000	Dark Green	Resin
DHP2000	2000	Light Green	Resin
DHP3000	3000	Brown	Resin
DHPKIT			Set of 7

PVA VP

VERSATILE, HIGH-SPEED DRY POLISHING SYSTEM



- Designed To Polish Softer Stones, Marble, Limestone, Travertine and Ceramic
- Can Be Used On Polishers, Sanders and Grinders At Any RPM
- · Versatile, High-Speed and Long Lasting
- 4-1/2" Discs Do Not Clog
- Formulated with A Silicon Carbide Abrasive and A Polyvinyl Alcohol Bond
- Grits Range From Extra Coarse To Extra Fine
- Available with A 5/8"-11 Disposable Zinc Hub





PART NO.	SIZE	GRIT	ARBOR	FINISH
SPVA45WH	4-1/2"	40	5/8"-11	Extra Coarse
SPVA45RH	4-1/2"	80	5/8"-11	Coarse
SPVA45BH	4-1/2"	220	5/8"-11	Medium
SPVA45GH	4-1/2"	400	5/8"-11	Fine
SPVA45YH	4-1/2"	600	5/8"-11	Extra Fine

PVA VP Polishing Disc with Hub



PVA MS STYLE

MARBLE EDGE POLISHING SYSTEM



- Best Polishing Solution for Glass Tile, Marble, Limestone and Travertine
- Ideal for Baseboard, Corner and Countertop Edge Applications
- Fast Working, Long Lasting At An Affordable Price
- 4" Discs Can Also Be Used for Paint Removal, As The Material Will Not Clog
- Works Well On Most Common High-Speed Grinders
- Grits Range From Extra Coarse To Extra Fine
- Available with a 5/8" Arbor
- Very Effective On Contours, Edges and Irregular Surfaces
- Polishes Stainless Steel to a mirror-like finish

PART NO.	SIZE	MAXIMUM RPM	ARBOR	GRIT	FINISH	QUANTITY
PVAMSW	4"	12,000	5/8"	40	Extra Coarse	10
PVAMSR	4"	12,000	5/8"	80	Coarse	10
PVAMSB	4"	12,000	5/8"	220	Medium	10
PVAMSG	4"	12,000	5/8"	400	Fine	10
PVAMSY	4"	12,000	5/8"	600	Extra Fine	10
PVAMSK	4"	12,000	5/8"	Assortment	All	10
SPVAMSW	4"	12,000	5/8"	40	Extra Coarse	1
SPVAMSR	4"	12,000	5/8"	80	Coarse	1
SPVAMSB	4"	12,000	5/8"	220	Medium	1
SPVAMSG	4"	12,000	5/8"	400	Fine	1
SPVAMSY	4"	12,000	5/8"	600	Extra Fine	1





ALSO AVAILABLE IN SINGLE PACK

DRY POLISHING DISCS

PVA QC STYLE

MARBLE EDGE POLISHING SYSTEM



- Best Polishing Solution for Glass Tile, Marble, Limestone and Travertine
- Ideal for Baseboard, Corner and Countertop Edge Applications
- "Quick Change" Process Saves Time, Increases Productivity
- Works Well On Most Common Low Speed Polishing Tools
- 4" Discs Can Also Be Used for Paint Removal, As The Material Will Not Clog
- Fast Working, Long Lasting At An Affordable Price
- Grits Range From Extra Coarse To Extra Fine
- Polishes Stainless Steel To A Mirror-Like Finish
- Utilizes a Snail Lock Adapter (SFAT)

PART NO.	SIZE	MAXIMUM RPM	ARBOR	GRIT	FINISH	QUANTITY
PVAQCW	4"	4,000	QC	40	Extra Coarse	5
PVAQCR	4"	4,000	QC	80	Coarse	5
PVAQCB	4"	4,000	QC	220	Medium	5
PVAQCG	4"	4,000	QC	400	Fine	5
PVAQCY	4"	4,000	QC	600	Extra Fine	5
PVAQCK	4"	4,000	QC	Assortment	All	5
SPVAQCW	4"	4,000	QC	40	Extra Coarse	1
SPVAQCR	4"	4,000	QC	80	Coarse	1
SPVAQCB	4"	4,000	QC	220	Medium	1
SPVAQCG	4"	4,000	QC	400	Fine	1
SPVAQCY	4"	4,000	QC	600	Extra Fine	1
PVA-5/8	4"	4,000	5/8"-11	Sı	nail Lock Adapte	er








ALSO AVAILABLE IN SINGLE PACK

TURBOSHINE

POLISHING AND SCRATCH REMOVAL SYSTEM









 Quick Disc Type and Grit Changes Reduces Downtime



RIGID

- Provides The Best Results On Granite, Engineered Stone/Quartz Surfaces, and Difficult Marbles Such As Green and Black
- Final Polishing Wheel Achieves The Highest Possible Shine
- Unique #2000 Grit Disc Designed for Engineered Stone and Quartz Surfaces
- Works Great On Concrete Slabs









BLACK BUFF

WHITE BUFF

GRINDING WHEEL

ADAPTER

PART NO.	SIZE	MAX. RPM	TYPE	THREADS	GRIT	COLOR
TSR30100R	3"	4,000	Rigid	Dual Adapter System	100	Blue
TSR30200R	3"	4,000	Rigid	Dual Adapter System	200	Yellow
TSR30500R	3"	4,000	Rigid	Dual Adapter System	500	Red
TSR31000R	3"	4,000	Rigid	Dual Adapter System	1000	Dark Green
TSR32000R	3"	4,000	Rigid	Dual Adapter System	2000	Light Green
TSR33000R	3"	4,000	Rigid	Dual Adapter System	3000	Brown
TSR3BLACK	3"	4,000	Rigid	Dual Adapter System	Buff	Black
TSR3WHITE	3"	4,000	Rigid	Dual Adapter System	Buff	White
DAS35/8PD	3"	6,000	Adapter	5/8"-11		
DAS3M14PD	3"	6,000	Adapter	M14-2		
TRM30060M	3"	14,500	Grinding Wheel	5/8"-11	60	Gray
TRM30120M	3"	14,500	Grinding Wheel	5/8"-11	120	White
TRM40120M	4"	14,500	Grinding Wheel	5/8"-11	60	Gray
TRM40120M	4"	14,500	Grinding Wheel	5/8"-11	120	White

ANTIQUE BRUSH WHEELS

BRUSH WHEELS FOR TEXTURED FINISHES



- Create A Textured Finish On The Edge and Surface Of Engineered Stone/Quartz Surfaces
- Developed with TYNEX®, A Filament From Dupont, To Ensure Safety and Exceptional Performance
- Utilizes A Snail Lock Adapter (SFAT)
- Fits Most Popular Edge Polishing Machines, Hand-Held Sanders and Polishers
- Grits Sequence of #24, #36, #60, #120, #240 and #320
- · Can Be Used On Other Stone Such As Granite


	SNAIL LOCK			5"
GRIT	BOND TYPE	MAXIMUM RPM	PART NO.	PART NO.
24	Resin	4,000	AB4024	AB5024
36	Resin	4,000	AB4036	AB5036
60	Resin	4,000	AB4060	AB5060
120	Resin	4,000	AB4120	AB5120
240	Resin	4,000	AB4240	AB5240
320	Resin	4,000	AB4320	AB5320
Snail Lo	ock Adapter	4,000	PVA-5/8	
Snail Lo	ock Adapter	2,000		SFAT-5/8

FELT WHEELS

FOR USE WITH POLISHING POWDERS



- · Designed for Use with Polishing Powders, Pastes or Bars
- Very Durable Holds Up To Acidic Compounds and Heat Generated During Final Polishing
- · Hook and Loop Backed Buffing Wheels
- 1/4" Thick with The Perfect Degree Of Hardness Versus Softness








PART NO.	SIZE	TYPE
FW30250	3"	Hook & Loop
FW40250	4"	Hook & Loop
FW50250	5"	Hook & Loop

RIGID BACKER PADS



- High-Quality Backer Pad Is Super Rigid and Flat
- Eliminates The Wavy Finish When Polishing
- Hook and Loop Backed
- The Rigidness Of The Pad Enables Work in Small Areas Such As Corners or Staircases
- Accepts Polishing Pads, Sandpaper and Felt Wheels

PART NO.	SIZE	MAX RPM	THREAD
GP35/8RG	3"	6,000	5/8"-11
GP45/8RG	4"	6,000	5/8"-11
GP55/8RG	5"	6,000	5/8"-11
GP3M14RG	3"	6,000	M14
GP4M14RG	4"	6,000	M14
GP5M14RG	5"	6,000	M14
GP3M16RG	3"	6,000	M16
GP4M16RG	4"	6,000	M16
GP5M16RG	5"	6,000	M16
RGSPACER			Spacer

FLEXIBLE BACKER PADS



- High-Quality Backer Pad Is Extremely Flexible
- Ideal for Tough Contours and Inside Curves
- · Hook and Loop Backed
- Highly Resistant To The Rigors Of Daily Use Provides A Long Life
- Accepts Polishing Pads, Sandpaper and Felt Wheels

PART NO.	SIZE	MAX RPM	THREAD
GP25/8PD	2"	6,000	5/8"-11
GP35/8PD	3"	6,000	5/8"-11
GP45/8PD	4"	6,000	5/8"-11
GP55/8PD	5"	6,000	5/8"-11
GP3M14PD	3"	6,000	M14
GP4M14PD	4"	6,000	M14
GP5M14PD	5"	6,000	M14
GP3M16PD	3"	6,000	M16
GP4M16PD	4"	6,000	M16
GP5M16PD	5"	6,000	M16

GV BACKER PADS



- High-Quality Backer Pad Is Rigid and Flat, But Provides Just The Right Amount Of Flexibility
- Ideal for Bullnosed Edges and Flat Surfaces.
- · Hook and Loop Backed
- Accepts Polishing Pads, Sandpaper and Felt Wheels
- Fits On Makita® GV5000 & GV5010 Sanders

PART NO.	SIZE	MAXIMUM RPM	DESCRIPTION
GV4MPPD	4"	4,500	M8-1.25 Male
GV5MPPD	5"	4,500	M8-1.25 Male

WET/DRY VACUUM



Virtually **Dust-Free** for **Maximum Health Protection!**





PART NO.	SIZE	DESCRIPTION
HEPA1035	9.3 Gal (35 Liters)	HEPA Wet/Dry Vacuum
HEPA1050	13.2 Gal (50 Liters)	HEPA Wet/Dry Vacuum

HEPA

WET/DRY VACUUUM



- Gallons
- Adjustable, Foldable Push Bar
- Extremely Robust Chassis with Locking Brakes
- On-Board Receptacle for Power Tools
- Virtually Dust-Free Work for Maximum Health Protection
- Patented HEPA 13 Cartridge Filter With 2 Independent Filter Chambers
- Consistent High Level of Suction Power During The Filter Cleaning
- Automatic Filter Cleaning Through Air Backwashing; Done Every 45 Seconds
- Visual And Acoustic Warning Signal
- **Dust-Tight Lockable Connection** Nozzle
- Easy-To Clean Blow-Out Filter
- Flat Surface on The Motor Head
- Optional Adapter Plate for All Common Tool Cases

PART NO.	SIZE
HEPA1035	9.3 Gal (35 Liters)
HEPA1050	13.2 Gal (50 Liters)

SPECIFICATIONS:			
Model:	HEPA1035/HEPA1050		
Function:	HEPA Wet/Dry Vacuum		
Rating:	120 Volts		
	50Hz - 60Hz		
Amperage:	9.0A		
Power:	1080W		
Weight:	. 33 lbs (15 kgs)/35 lbs (16 kgs)		
Cord Length:	33ft (10m) 3/14 AWG		
	1.5in x 16.4ft (5m)		
	9.3 Gal (35 L)/13.2 Gal (50 L)		
Filter Capacity:	5.3 Gal (20 L)/7.9 Gal (30 L)		
Air Flow Rate:	157 CFM		
	92" (234.5cm)/100" (254.9cm)		
	LpA = 74 dB(A)'		
Tank Dimensions-HEPA1035:			
	(540 x 390 x 635 mm)		
Tank Dimensions-HEPA1050:	21.3 x 15.4 x 30.3 in		
	(540 x 390 x 770 mm)		

EQUIPMENT INCLUDED:

- Stainless Steel Vacuum Tube Set (Part No. 102018)
- Hose Assembly 16.4 ft (5m) (Ø 1.5in/38mm) (Part No. 118176)
- Fleece Filter Bag (Qty 5) (Part No. 102066)
- · Crevice Nozzle (Part No. 102016)
- Dry Floor Nozzle (Part No.102125)
- · Round Brush (Part No. 102017)
- Rubber Adapter #1 Ø 21/25/32 mm (Part No. 118122)
- Rubber Adapter #2 Ø 38/43mm (Part No. 118141)
- Torx Key T30 (Part No. 118124)
- Brush Strips (2pc Set) 450mm For 102125 (Part No. 102127)
- Rubber Strips (2pc Set) (Part No. 102126)

Easy & Reliable... Multi-Adapting Dust Covers!












ECOGUARD GX SERIES

UNIVERSAL DUST COVER FOR GRINDING





- Rugged Construction for Heavy-Duty Applications
- Clear Cover for Better Visibility
- Perfect for Grinding and Sanding or Surface Preparation Work
- Can Grind Tight Against The Wall
- Easy Installation and Wheel Changes
- Fits On Most 4-1/2", 5" & 6" High-Speed Angle Grinders
- Must Be Used with A Vacuum
- Removes More Than 97% of the Dust

PART NO.	SIZE	DESCRIPTION
ECOGRGX5	5"	Dust Collection Cover w/Universal Adapter
ECOGX5KIT	5"	Ecoguard GX5 & 18" Connector Hose Kit
500026	18"	1-1/2" Tapered-2-1/4" Flexible Connector Hose
500073	54"	1-1/2" Tapered-2-1/4" Flexible Connector Hose
HEP110021		Air/Exhaust Hose Adapter

ECOGUARD CX SERIES

UNIVERSAL DUST COVER FOR CUTTING



- Designed for Collecting Dust/Debris When Using A High-Speed Angle Grinder
- · Perfect for Tuckpointing and Crack Chasing
- Accepts Blades Up To 5" Diameter
- Rugged Construction for Heavy-Duty Applications
- · Straight Precise Cuts Using Support Base
- Clear Cover for Better Visibility
- Fits On Most 4-1/2", 5" & 6" High-Speed Angle Grinders
- Easy Installation and Blade Changes
- Adjustable Cutting Depth Maximum 1-1/2"
- · Removes More Than 97% of the Dust
- · Must Be Used with A Vacuum

PART NO.	SIZE	DESCRIPTION
ECOGRCX5	5"	Dust Collection Cover w/Universal Adapter
ECOCX5KIT	5"	Ecoguard CX5 & 18" Connector Hose Kit
500026	18"	1-1/2" Tapered-2-1/4" Flexible Connector Hose
500073	54"	1-1/2" Tapered-2-1/4" Flexible Connector Hose
HEP110021		Air/Exhaust Hose Adapter

4" WET/DRY SANDING/ POLISHING KITS

PERFECT FOR SANDING AND POLISHING EDGE TREATMENTS





- · Designed to Collect Dust/Water When Using A Variable-Speed Angle Grinder
- Comes In Wet And Dry Versions For All Applications
- Perfect For Sanding And Polishing Edge Treatments
- · Easy Installation And Disc Change
- Fits on Most Popular Variable-Speed Angle Grinders: 4-1/2, 5" and 6"
- Fits On Alpha® 800 Series Pneumatic Polishers
- Must Be Used With A Vacuum (SPD4KIT only)
- Great For Use With An Alpha® HEPA Vacuum (SPD4KIT only)

PART NO.	SIZE	MAXIMUM RPM	DESCRIPTION
SPW4KIT	4"	6,000	Wet Sanding/Polishing Kit
SPD4KIT	4"	6,000	Dry Sanding/Polishing Kit

DUST COLLECTION COVERS

ECOGUARD CD

DUST AND WATER GUARD FOR CORE DRILLING



- Wet/Dry Cover for Drilling and Core Drilling Applications
- Fits Most Vacuum Dust Hoses
- Accepts up to 2-1/2" Core Bit
- Can Be Secured On Horizontal and Vertical Surfaces with Vacuum During Application
- · Prevents Splashing When Used with Water

PART NO.	RECOMMENDED FOR	DESCRIPTION
ECOGRDCD	Core Drilling	Dust Collection Cover CD

ECOGUARD G7

DUST COLLECTION COVER FOR GRINDING



- Designed for Collecting Dust When Using A High-Speed Angle Grinder
- · Accepts Grinding Wheels Up To: 7"
- Rugged Construction for Heavy-Duty Applications
- Perfect for Grinding and Sanding or Surface Preparation Work
- Can Grind Tight Against The Wall
- Clear Cover for Better Visibility
- Fits On Most High-Speed Angle Grinders: 7" & 9"
- Easy Installation and Wheel Changes
- The G7 Has A Flexible Head Allowing for A Natural Grinding Motion
- Removes More Than 90% of the Dust
- Must Be Used with A Vacuum

PART NO.	SIZE	DESCRIPTION
ECOGRDG7	7"	Dust Collection Cover G7
ECOG7KIT	7"	Ecoguard G7 & 54" Connector Hose Kit
500026	18"	Flexible Connector Hose (1-1/2" Tapered-2-1/4")
500073	54"	Flexible Connector Hose (1-1/2" Tapered-2-1/4")
HEP110021		Air/Exhaust Hose Adapter



MULTI-ADAPTER SYSTEM



POP-UP WINDOW



FLEX-SEAL SYSTEM

ECOGUARD W6 / W9

DUST COLLECTION COVER FOR WIDER KERF CUTTING




- Designed for Collecting Dust and Debris When Using A High-Speed Angle Grinder
- Perfect for Tuckpointing and Crack Chasing
- Accepts 6" Diameter Blades (W6), 7" and 9" Diameter Blades (W9)
- Removes More Than 90% Of Dust
- Rugged Construction for Heavy-Duty Applications

- Straight Precise Cuts Using Support Base
- Easy Installation and Blade Changes
- Fits On Selected 6", 7" and 9" High-Speed Angle Grinders
- Adjustable Cutting Depth Maximum 1-3/4" (W6) and 2-3/8" (W9)
- · Must Be Used with A Vacuum






PART NO.	SIZE	DESCRIPTION	
ECOGRDW6	6"	Dust Collection Cover W6	
ECOGRDW9	9"	Dust Collection Cover W9	
ECOW6KIT	6"	Ecoguard W6 & 18" Connector Hose Kit	
ECOW9KIT	9"	Ecoguard W9 & 54" Connector Hose Kit includes Extendable Handle Bracket (Part# 510000)	
500026	18"	Flexible Connector Hose (1-1/2" Tapered-2-1/4")	
500073	54"	Flexible Connector Hose (1-1/2" Tapered-2-1/4")	
HEP110021		Air/Exhaust Hose Adapter	

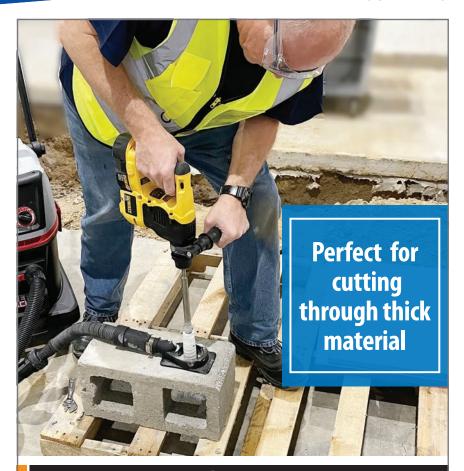

LASER CORE BIT & CORE BIT EXTENDER





LASER CORE BIT

WET/DRY LASER SEGMENTED CORE BITS





- · Perfect for Porcelain Pavers and Natural Stone
- · Can Be Used with Core Bit Extension for Hammer Drill/Rotary Hammer
- Fits On Most Popular High-Speed Grinders with 5/8"-11 Spindle
- Convenient for Wet or Dry Applications (WLB00380 and WLB00500 are WET USE ONLY!)

PART NO.	DIAMETER	MAX RPM	TYPE	THREADS
WLB00380	3/8"	12,000	Wet Only	5/8"-11
WLB00500	1/2"	12,000	Wet Only	5/8"-11
DLB00750	3/4"	12,000	Wet/Dry	5/8"-11
DLB01000	1"	12,000	Wet/Dry	5/8"-11
DLB01250	1-1/4"	12,000	Wet/Dry	5/8"-11
DLB01375	1-3/8"	12,000	Wet/Dry	5/8"-11
DLB01500	1-1/2"	12,000	Wet/Dry	5/8"-11
DLB02000	2"	12,000	Wet/Dry	5/8"-11
DLB02500	2-1/2"	12,000	Wet/Dry	5/8"-11
DLB03000	3"	12,000	Wet/Dry	5/8"-11
DLB04000	4"	12,000	Wet/Dry	5/8"-11



CORE BIT EXTENDER

PERFECT FOR CUTTING THROUGH THICK MATERIAL



- Convert Your Rotary/Hammer Drill With The SDS-Plus Fitting Into A Core Drill With A 5/8"-11 Thread
- · Extend Reach In Hard To Access Areas
- Effortlessly Switch Between Accessories And Sizes
- Made With High Strength Steel
- Perfect For Thick Materials Such As Cutting Through Concrete, Brick, Pavers, Stone, And More
- Compatible With Diamond-Tipped Core Bits For Dry Coring To Extend The Reach
- *Must Be Used Without Percussion of Rotary Hammer/Hammer Drill

PART NO.	SIZE	MAXIMUM RPM	TYPE	THREADS
CBESDSS	6" (150mm)	12,000	SDS Plus Shank Short	5/8"-11
CBESDSL	10" (250mm)	12,000	SDS Plus Shank Long	5/8"-11

VACUUM BRAZED TRIMMER BIT

DRY CUTTING OF LARGE HOLES OR CURVED LINES



- Great For Use In Construction Trades Wherever Non-Standard Shaped Cutouts Are Needed
- Perfect For Electrical Receptacles, Water-Valve Holes, Drains, Shower Knobs, Etc.
- Vacuum Brazed Technology Provides Extended Life
- Use On Granites, Engineered And Natural Stones, Porcelain And Ceramic Tiles
- · Can Be Used Wet Or Dry
- Fits On A High-Speed Trimmer Tools

PART NO.	DIAMETER	MAXIMUM RPM
DTB00250	1/4"	33,000

ELECTROPLATED DRILL BITS

PREMIUM DRILL BITS FOR ANCHOR HOLES





- Designed for Drilling Holes in Tile and Stone for Pre-Installation or Post-Installation Placement
- Works Great On Marble, Granite, Engineered Stone, Ceramic, Porcelain and Glass Tile and Panels
- Can Be Used On A Standard 3/8" or Larger Drill
- Can Fit On Water-Fed Polishers with 5/8"-11 Spindles Using The Drill Bit Adapter
- Ideal for Drilling Holes for Anchors for Bathroom Fixtures, Faucet and Plumbing Pipes
- Available in 3/16", 1/4", 5/16", 3/8", 1/2", 1-3/8" and 1-1/2" Sizes
- A Must–Have for The Tile Installer's Tool Box
- · Wet Use Only

PART NO.	DIAMETER	MAXIMUM RPM	TYPE
CH7205	3/16"	3,500	3/8" Shank
CH7206	1/4"	3,500	3/8" Shank
CH7208	5/16"	3,500	3/8" Shank
CH7210	3/8"	3,500	3/8" Shank
CH7212	1/2"	3,500	3/8" Shank
CH7235	1-3/8"	3,500	3/8" Shank
CH7240	1-1/2"	3,500	3/8" Shank
CH1058			Adapter 10mm to 5/8"*
			(*for all polishers)


EZ WEDGE SYSTEM

TILE LEVELING SYSTEM FOR EDGES AND CORNERS

EZ WEDGE SYSTEM

Leveling System Designed for Edges and Corners



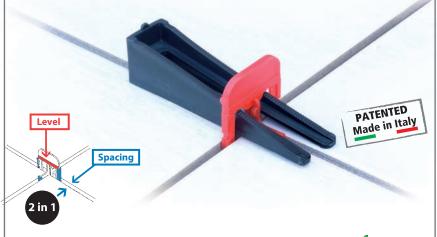

- ✓ Install Along Tile Edges
- ✓ Add Angle Tabs to Install on Corners
- ✓ Save Time & Money Up to 75%
- ✓ Available in 1/16" (1.5mm), 1/8" (3mm) & 3/16" (5mm)
- ✓ Dual Function No Spacers Required







Optional Plier Available for Calibrated installations

PART NO.	SIZE	TYPE	COLOR	QTY
EZWEDGELV		Wedge		130
EZWCT15WH	1/16" (1.5mm)	Joint Clip & Angle Tab	White	200
EZWCT30RD	1/8" (3.0mm)	Joint Clip & Angle Tab	Red	200
EZWCT50BK	3/16" (5.0mm)	Joint Clip & Angle Tab	Black	200
EZPLIER		Plier		1

EZ CLICK SYSTEM

TILE LEVELING SYSTEM FOR EDGES AND CORNERS



	1			
PART NO.	SIZE	TYPE	COLOR	QTY
EZCLICKCP		Screw Cap		50
EZCLB10WH	1/32" (1.0mm)	Linear Joint Screw Base	White	200
EZCLB20YW	3/32" (2.0mm)	Linear Joint Screw Base	Yellow	200
EZCLB30RD	1/8" (3.0mm)	Linear Joint Screw Base	Red	200
EZCLB40BK	5/32" (4.0mm)	Linear Joint Screw Base	Black	200
EZCXB20BL	3/32" (2.0mm)	X Joint Screw Base	Blue	200
EZCXB30VI	1/8" (3.0mm)	X Joint Screw Base	Violet	200
EZCXB40GY	5/32" (4.0mm)	X Joint Screw Base	Gray	200
EZCTB20BR	3/32" (2.0mm)	T Joint Screw Base	Brown	200
EZCTB30OR	1/8" (3.0mm)	T Joint Screw Base	Orange	200
EZCTB40GR	5/32" (4.0mm)	T Joint Screw Base	Green	200

EZ CLICK2 SYSTEM

TILE LEVELING SYSTEM FOR EDGES AND CORNERS





- Designed for Wet Installation of 3/4" (2cm) Thick Pavers
- Instant Screw Ejection Leveling System

by Hand (No Tools Required)

- Proprietary Scratch-Prevention Edge
- Built-in Spacer Calibration: 1mm and 4mm available
- Color Coded Base Screws for Easy Identification
- Cap Can Be Re-Used More Than 500 Times





PART NO.	SIZE	TYPE	COLOR	QTY
EZCLICKCP		Screw Cap		50
EZCLB10W2	1/32" (1.0mm)	Linear Joint Base Screw	White	200
EZCLB40B2	5/32" (4.0mm)	Linear Joint Base Screw	Black	200

MANIFOLD SYSTEM

FILTER REGULATOR MANIFOLD SYSTEMS

- Complete Filter/Regulator Manifold System
- Filter/Regulator with Automatic Drain
- · Emergency Kill Switch
- · Manifold Block with Multiple Ports
- · High Flow Couplers
- Wall Clamp



PART NO.	SIZE	THREADS	DESCRIPTION
1040-1000	53 CFM	3/8" NPT	3-Port Manifold, Couplers, (2) 1/4" FNPT Plugs & (1) 3/8" FNPT Plug
1040-1001	106 CFM	1/2" NPT	4-Port Manifold, Couplers, (3) 1/4" FNPT Plugs & (1) 3/8" FNPT Plug
1040-1002	53 CFM	3/8" G	3-Port (G) Manifold, Couplers, (2) 1/4" FNPT Plugs & (1) 3/8" FNPT Plug
1040-1003	106 CFM	1/2" G	4-Port (G) Manifold, Couplers, (3) 1/4" FNPT Plugs & (1) 3/8" FNPT Plug

Includes Filter/Regulator, Wall Clamp, Kill Switch, Silencer, Nipple

2 Filter/Regulator with Automatic Drain & Replacement Filter

- Protects Your Tools From Contaminants
- Gauge Can Be Adjusted To The Specified Pressure
- · Helps Prevent Pressure Drops When Using A Large Volume Of Air
- Comes in Two Sizes (53 CFM and 106 CFM)



DESCRIPTION		
Regulator w/ 5 Micron Filter+Drain+Filter		
Regulator w/ 5 Micron Filter+Drain+Filter		
Regulator w/ 5 Micron Filter+Drain+Filter		
Regulator w/ 5 Micron Filter+Drain+Filter		
3/8" 5-Micron Filter Replacement		
1/2" 5-Micron Filter Replacement		
Silencer 1/4" NPT		
Silencer 3/8" NPT		


MANIFOLD SYSTEM

2 High-Flow Couplers



- Push-To-Connect System
- Allow Twice The Flow to your Air Tools

PART NO	SIZE	DESCRIPTION
1030-1085	1/4"	Coupler 1/4" Female NPT
1030-1086	1/4"	Coupler 1/4" Male NPT
1030-1087	1/4"	Plug 1/4" Female NPT
1030-1088	1/4"	Plug 1/4" Male NPT
1030-1089	1/4"	Coupler 3/8"Female NPT
1030-1090	1/4"	Coupler 3/8" Male NPT
1030-1091	1/4"	Plug 3/8"Female NPT
1030-1092	1/4"	Plug 3/8"Male NPT
1030-1093	1/4"	Coupler 1/2"Female NPT
1030-1094	1/4"	Coupler 1/2" Male NPT
1030-1095	1/4"	Plug 1/2" Female NPT
1030-1096	1/4"	Plug 1/2"Male NPT
1030-1097	1/4"	Universal Coupler 1/4" Male NPT
1030-1098	1/4"	Universal Plug 1/4" Male NPT

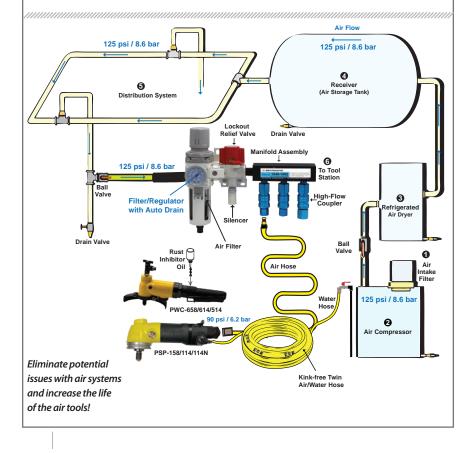

- All-Weather Flexibility From -40°F to +140°F
- Kink-Free Under Pressure
- Lightweight and Abrasion Resistant
- · Zero Memory Allowing It To Lay-Flat
- Made Of A Premium Hybrid Polymer Material
- Comes in Many Lengths
- Pneumatic and Water Hoses Available
- Many Connectors Available



TWIN AIR/WATER HOSE

(FOR PSP-158/PSP-114)



PART NO.	SIZE	DIAMETER	THREADS
1030-0200	30ft./9.1m	1/4" Air / 1/8" Water	1/4" BSPT Air / 1/8" BSPT Water
1030-0201	30ft./9.1m	1/4" Air / 1/8" Water	1/4" BSPT Air / 1/8" BSPT Water



AIR HOSE

(FOR AIR-830/850/PSC-600)



PART NO.	SIZE	DIAMETER	THREADS
1030-0002	15ft./4.5m	1/4"	1/4" NPSM x 1/4" NPT(Female Swivel)
1030-0010	20ft./6.0m	1/4"	1/4" NPSM x 1/4" NPT(Female Swivel)

Available Hose sizes: 25ft, 30ft, 35ft & 40ft. Call for Custom sizes or for more information.



WATER HOSE

(FOR AIR-830/850/PSC-600)



PART NO.	SIZE	DIAMETER	THREADS
1030-0003	15ft./4.5m	1/4"	1/8" NPSM x 3/4" 11GHT(GHT)
1030-0011	20ft./6.0m	1/4"	1/8" NPSM x 3/4" 11GHT(GHT)

Available Hose sizes: 25ft, 30ft, 35ft & 40ft. Call for Custom sizes or for more information.



AIR HOSE

(FOR PSC-150)



PART NO.	SIZE	DIAMETER	THREADS
1030-0031	15ft./4.5m	1/4"	3/8" NPSM x 1/4" NPT(Female Swivel)
1030-0033	20ft./6.0m	1/4"	3/8" NPSM x 1/4" NPT(Female Swivel)

Available Hose sizes: 25ft, 30ft, 35ft & 40ft. Call for Custom sizes or for more information.







PART NO.	SIZE	DIAMETER	THREADS
1030-0032	15ft./4.5m	1/4"	1/4" NPSM x 3/4" 11GHT(GHT)
1030-0030	20ft./6.0m	1/4"	1/4" NPSM x 3/4" 11GHT(GHT)

Available Hose sizes: 25ft, 30ft, 35ft & 40ft. Call for Custom sizes or for more information.



ADAPTER HOSE (FOR MANIFOLD SYSTEMS)

PART NO.	SIZE	DIAMETER	THREADS
1030-0025	1ft./0.3m	1/2"	1/2" NPT Swivel
1030-0026	2ft./0.6m	1/2"	1/2" NPT Swivel
1030-0027	3ft./0.9m	1/2"	1/2" NPT Swivel



MOBILE HOSE (FOR MANIFOLD SYSTEMS)

PART NO.	SIZE	DIAMETER	THREADS
1030-0050	15ft./4.5m	1/2"	1/2" NPT Swivel w/Hose Protector
1030-0052	20ft./6.0m	1/2"	1/2" NPT Swivel w/Hose Protector

Available Hose sizes: 25ft, 30ft, 35ft & 40ft....Custom sizes also available. Call for more information.





EXHAUST HOSE (SPECIALTY)

*Use with 5" & 6" Pull-To-Cut Shroud Kit


PART NO.	SIZE	DIAMETER	THREADS
VH91100	12ft./3.6m	3/4"	1-1/4" O.D. threaded x 2-1/4" standard

ACCESSORIES



PART NO.	SIZE	TYPE	DESCRIPTION
APRONHLSR	55"L x 60" W (140cm L x 152cm W)	Hoodie	Waterproof Hoodie Apron (Regular)

ACCESSORIES





Multi-Purpose Waterproof Apron - LONG SLEEVE



APRON

MULTI-PURPOSE APRON



- · Rubber Cuffs Provides Full Coverage
- Bright Neon Yellow Color Provides Greater Visibility
- · Perfect for Wet or Dry Environments
- Protects From Dust, Water and Other Chemicals
- Dual-Adjustable Clips Makes For A Perfect Fit





PART NO.	SIZE	TYPE	DESCRIPTION
APRON2LSS	42"L X 41"W	Long Sleeve	Multi-Purpose Waterproof Apron (Small)
APRON2LSR	55"L X 60"W	Long Sleeve	Multi-Purpose Waterproof Apron (Regular)

APRON

MULTI-PURPOSE WATERPROOF APRON SLEEVELESS



- Sleeveless with Wide Straps for Ease and Comfort
- Bright Neon Yellow Color Provides Greater Visibility
- · Perfect for Wet or Dry Environments
- Protects From Dust, Water and Other Chemicals
- Dual-Adjustable Clips Makes For A Perfect Fit






PART NO.	SIZE	TYPE	DESCRIPTION
APRON2000	53"L X 44"W	Sleeveless	Multi-Purpose Waterproof Apron (Regular)
APRON2100	57"L X 58"W	Sleeveless	Multi-Purpose Waterproof Apron (X-Large)

HIGH-VISIBILITY LUMBAR SUPPORT BELT

RELIEVES LOAD ON THE SPINE





- Provides Greater Stability To The Spine During Heavy Lifting Exercises
- Limits Overstrain By Supporting The Muscles Around The Spine
- Plastic Support Bars Help Prevent The Brace From Rolling Or Bunching
- Tapered Fit For Comfort While Sitting Or Standing
- Breathable Fabric With Reflective Strips For Added Safety And Comfort



PART NO.	SIZE	FINISH	COLOR
LSB0000S	S	Reflective	Black & Neon Yellow
LSB0000M	М	Reflective	Black & Neon Yellow
LSB0000L	L	Reflective	Black & Neon Yellow
LSB000XL	XL	Reflective	Black & Neon Yellow
LSB00XXL	XXL	Reflective	Black & Neon Yellow

HIGH-VISIBILITY SAFETY VEST

REFLECTIVE HIGH-VISIBILITY



- Lightweight Design for a Comfortable Fit
- Neon Fabric Helps Keep You Visible During the Daytime
- Reflective Strips Provide 360 Degrees of Visibility
- Fits Great Over Jackets, Coats, Shirts, and Sweaters
- Designed For Activities Like Construction, Utility, Warehouse, Etc.
- Class 2 Vest Meets The Requirements Of ANSI/ISEA 107-2010
- Complies With The Federal Highway Mandate (2009) Manual Of Uniform And Traffic Control Devices







REFLECTIVE STRIPS

REINFORCED ZIPPER

DUAL POCKETS

PART NO.	SIZE	DIAMETER	FINISH	COLOR
SVY0000S	45.6in (116cm) x 25.6in (65cm)	S	Reflective	Neon Yellow
SVY0000M	48.0in (122cm) x 26.3in (67cm)	M	Reflective	Neon Yellow
SVY0000L	49.6in (126cm) x 27.1in (69cm)	L	Reflective	Neon Yellow
SVY000XL	51.0in (130cm) x 27.9in (71cm)	XL	Reflective	Neon Yellow
SVY002XL	52.6in (134cm) x 28.7in (73cm)	2XL	Reflective	Neon Yellow
SVY003XL	55.9in (142cm) x 29.5in (75cm)	3XL	Reflective	Neon Yellow

9" WET BLADE CUTTING KIT

CONVERT A HIGH-SPEED ANGLE GRINDER INTO A WET TOOL



- Can Be Used On Most Grinders With Minimal Alterations
- Fits Most 7" and 9" Angle Grinders
- Includes Kink-Free, Water-Feed Supplies, Plus GFCI
- Includes Extendable Handle Bracket to provide extra leverage for easy cutting power

Kit includes: 9" Safety Guard, Loc-Line Assembly, Plastic Tie, 4 Plastic Collars, Adapter (1/4 NPT>>>M10*P.1.0), Water Hose Assembly, Memory Wrap (3ft. / 1M), Quick Connect Adapter, GFCI Plug (120V), Hook & Loop Tie & Screw w/Spring Lock Washer and Floor Cutting Kit (Part# 510000)

PART NO.	SIZE	TYPE	RECOMMENDED FOR	DESCRIPTION
WBC9KIT	9"	110V	7" & 9" High-Speed Angle Grinders	Wet Blade Cutting Kit
WBC9KIT2V	9"	220V	7" & 9" High-Speed Angle Grinders	Wet Blade Cutting Kit
510000			Cutting Applications	Extendable Handle Bracket

5" & 6" WET BLADE CUTTING KITS

CONVERT DRY GRINDER FOR WET CUTTING



- Designed To Convert A High-Speed Angle Grinder Into A Wet Tool
- Can Be Used On Most Grinders with Minimal Alterations
- Fits Most 4-1/2", 5" and 6" High-Speed Angle Grinders
- Kink-Free Water Hose for Easy Maneuverability and Reducing Operator Fatigue
- Save Money and Use Your Tool Wet or Dry!

Kit includes: Safety Guard, Loc-Line Assembly, Plastic Tie, Stainless Steel Collar, Plastic Collar, Adapter (1/4 NPT>>>M10*P.1.O), Water Hose Assembly, Memory Wrap (3ft. / 1M), Quick Connect Adapter, GFCI Plug (120V) & Hook & Loop Tie

PART NO.	SIZE	TYPE	RECOMMENDED FOR	DESCRIPTION
WBC5KIT	5"	110V	4-1/2", 5" & 6" High-Speed Angle Grinders	Wet Blade Cutting Kit
WBC6KIT	6"	110V	4-1/2", 5" & 6" High-Speed Angle Grinders	Wet Blade Cutting Kit
WBC5KIT2V	5"	220V	4-1/2", 5" & 6" High-Speed Angle Grinders	Wet Blade Cutting Kit
WBC6KIT2V	6"	220V	4-1/2", 5" & 6" High-Speed Angle Grinders	Wet Blade Cutting Kit

WET SANDING/ POLISHING KIT

CONVERTS DRY POLISHER / SANDER INTO A WET TOOL



- Designed To Convert A Dry Polisher Into A Wet Tool
- · Save Money and Use Your Tool Wet or Dry!
- · Quick Solution for OSHA Compliance

PART NO.	FOR USE ON	RECOMMENDED FOR
WSPKIT	120V	Sanders & Polishers
WSPKIT2V	240V	Sanders & Polishers

Kit includes: Safety Guard, Loc-Line Assembly, Water Hose Assembly, Memory Wrap (3ft. / 1M), Quick Connect Adapter, GFCI Plug (120V) & Hook & Loop Strap

POOL COPING KIT

COMPLETE KIT FOR COPING PROJECTS



- Creates A Uniform Bullnose Edge Treatment With Ease
- Use On Granite, Engineered Stone, Marble, Limestone, Concrete, Crystallized Glass/Porcelain Slabs And Porcelain Payers
- Save Money and Use Your Dry Tool Wet!
- One Year Warranty* on VDP-700

PART NO.	RECOMMENDED FOR	
5480-6100	Pool Coping	

Kit includes: Safety Guard, Loc-Line Assembly, Water Hose Assembly, Memory Wrap (3ft. / 1M), Quick Connect Adapter, GFCI Plug (120V) & Hook & Loop Strap

SAFETY GLASSES



- Designed for Safety and Comfort
- · A Lightweight Frame with Padded Temples
- Adjustable Side Arms
- Soft Rubber Nose Bridge
- Clear Anti-Scratch Lenses
- Available in a single pair or 12-pack
- Complies with standard # BS EN 166:2001

PART NO.	DESCRIPTION
173002	Safety Glasses (Box of 12)
173008	Safety Glasses (Single Pair)

GROUND FAULT CIRCUIT INTERRUPTER



- Protect Polishing Personnel From Lethal Ground Current Loads
- Highly Recommended Piece Of Equipment
- Rated for 15 Amps

PART NO.	TYPE
GFCI-1	110V
GFCI-2	220V

TOOLBOXES

CONVENIENT, STACKABLE TOOL STORAGE



- Durable Storage Box With Spacious Interior Keeps Items Organized To And From Jobsites
- Variety of Accessories for Organization of Blades, Pads, Wrenches, and More
- · Wheel Dolly Allows for Easy Movement
- Available in 3 Sizes







PART NO.	SIZE	DESCRIPTION
ATB000S	16"X12"X5"	Small Box
ATB000M	16"X12"X7"	Medium Box
ATB000L	16"X12"X10"	Large Box
ATB04WD	17.8"X13.8"X5.3"	4 Wheel Dolly
ATB0CT4	17.8"X12"X26"	4pc Combo (Inc. Small, Medium, Large and Dolly)
ATB0CT5	17.8"X12"X30"	5pc Combo (Inc. 2-Small, Medium, Large and Dolly)
ATB00CP	17.4"X12"X2.3"	Connecting Plate
ATB0BCT	15.5"X11.6"X3.1"	Cavity Tray
ATB0CPF	14.3"X10"X0.8"	Top Cover Foam
ATB0PIS	15.4"X11.3"X3.1"	Plastic Divider Sheet
ATB0TSF	15.4"X11.3"X3.1"	Thick Sponge Foam

Optional accessories, sold separately:













Nichigo G-Tape™ 1000 Series

Multi-Purpose Surface Protection and Repair Tape



- Hand Tearing-Straight and Easy
- Residue Free Removal
- Waterproof
- All-Weather Usage ((-40°F to +176°F / -40°C to +80°C))
- Repositionable
- · Highly Weather/UV Resistant
- · Good Surface Protection
- · Great for Quick Repairs
- Easily Mark Tape with Ball Point Pen, Permanent Marker, China Marker, etc.
- · Available as a single roll or Case of 30 pcs.

PART NO.	COLOR	SIZE	BOND TYPE
1009CL-GT-2-164	Clear	2" x 164' (50mm x 50m)	Removable
1009GR-GT-2-164	Green	2" x 164' (50mm x 50m)	Removable
1006TG-GT-2-82	Black & Yelliow	2" x 82' (50mm x 25m)	Removable

Nichigo G-Tape™ 1008 Series

Long Term Masking and Storage



- Surface Protection of Metallic Raw Materials In Outdoor Settings
- · Long Term Masking For Painting And Welding
- · Hand Tearing-Straight and Easy
- Scrap-Less: Face To Face Contact Of Adhesive Separates Without Damaging The Adhesive
- High Weather Resistance: Residue Free Removal Even After 6 Months
- Repositionable
- All-Weather Usage ((-40°F to +176°F / -40°C to +80°C)

PART NO.	COLOR	SIZE	BOND TYPE
1008BK-GT-2-164	Black	2" x 164' (50mm x 50m)	Removable
1008SW-GT-2-164	White	2" x 164' (50mm x 50m)	Removable

Surface Protection

Repositionable Waterproof Surface Protection Tape



- Ideal For Masking For Concrete, Stucco, Mortars, And Bricks
- Easy To Tear By Hands Straight: No Cutting Tool Is Required
- High Weather Resistance: Residue Free Removal Even After 1 Month
- Scrap-Less: Face To Face Contact Of Adhesive Separates Without Damaging The Adhesive
- · Using As A Line Tape And Caution Sign Tape
- Repositionable No Wrinkles When Applied
- · Perfect For A Quick Stick On Various Materials
- All-Weather Usage ((-40°F to +176°F / -40°C to +80°C)
- Also Available in Blue and Red Upon Request

PART NO.	COLOR	SIZE	BOND TYPE
BAB0650	Black	6" x 164' (150mm x 50m)	Large Surface Protection
2010BK-GT-2-164	Black	2" x 164' (50mm x 50m)	Removable
2010BK-GT-6-164	Black	6" x 164' (150mm x 50m)	Removable





RSR-2000

RUST STAIN REMOVER IN GEL FORM



- Removes Common Rust Stains From Natural Stone Surfaces, Concrete, Brick, Terra Cotta, Mexican Tile, or Other Hard Porous Surfaces
- Specially Formulated To Work Extremely Fast
- Non-Hazardous Chemical Is Safe To Use and Will Not Harm The Environment
- Use On Floors, Countertops, Vertical Surfaces and Exterior Areas
- Available in 14oz Tube or Trial Size 1.4oz Bottle
- · Tube Covers Approximately 4 sqft

PART NO.	SIZE	CONTAINER
RSR-400G	14 oz. (400g)	Tube
RSR-040G	1.4 oz. (40g)	Bottle



Index

Α Q-Cut 35 Ground Fault Adapter Hose 79 Quad 28 AIR-300 21 Circuit Interrupter 85 Quad Adapters 41 AIR-680UW 18 G-Tape 88 Quad-W Adapters 41 AIR-830 / AIR-834 18, 20 Guide Rails 43 Air Hose 78 GV Backer Pads 63 Antique Brush Wheels 62 Apron Hoodie Apron 80 Rescue 40 Apron 82 Rigid Backer Pad 63 Hand Pads 57 AWS-110 8 Rotary Backer Pad 23 HEPA Vacuum 65 RSR-2000 90 High-Visibility Lumbar Support Belt 83 Ceramica Dry 54, 57 High-Visibility Ceramica EX 53, 55 Safety Vest 83 Sandpaper 51 Ceramica Metal 53 Hoodie Apron 80 Spike Disc 47 Ceramica Resin 54 Hoses 78 Ceramica TF 55 Hot-Rod 39 Ceramica Vitrified 53 Tile Bullnose Kit 26 Contour Granite & Eng. Stone 38 Toolboxes 86 Contour Porcelain 38 Katana 30 Trim Master 31 Cordless Saw Blade Ceramic Tile 36 Kirara Pads 56 Tuck Point 30 Cordless Saw Blade Glass 36 Core Bit Extender 71 Turboshine 61 L Countertop Trim Kit 5 Laminam® 33 Laser Core Bit 71 Ultracut APR Series 32 Libero 31 Diamond Blade Re-Dressing Tool 42 Ultracut GPM Series 32 Diamond Face Foam Pads 24 Dressing Stick 33 Manifold System 77 Vacuum Brazed F Manifold System 76 Trimmer Bit 72 Mason Master 40 Vetro 34 FCC-125 9 Mobile Hose 79 Vexcel Rigid Disc 49 ECC-KIT 10 Vextra Flat Disc 48 ECG-900 11 Vflex Sanding Disc 50 Eclipse II 29 Vortex For Granite 37 Eclipse Q 29 Plus 28 Vortex For Marble 37 Ecoguard CX Series 67 Porcellana 34 VSP-320 25 Ecoguard GX Series 66 Profilers B-Series 45 Ecoguard CD 68 Profilers V-Series 46 Ecoquard W Series 69 Profilers Z-Series 46 Electroplated Drill Bits 72 PSC-150 7 Water Hose 79 ESC-150 Countertop Trim Kit 3 PSC-150 Miter Cutting Kit 2 Wet Blade Cutting Kit 84 ESC-150 Miter Cutting Kit 2 PSC-600 15 Wet Sanding/Polishing Kit 85 Exhaust Hose 79 PSP-158 17 Wool Pads 23 EZ Click System 74 Pull-To-Cut Shroud Kits 42 EZ Thin Tile Cutters 44 PVA MS Style 59

PVA QC Style 60 PVA VP Style 58 PWC-658 13

EZ Wedge System 73

Felt Wheels 62 Flexible Backer Pad 63

Product Literature

Catalogs

Alpha® provides printed and digital product catalogs to best serve the particular needs of our customers. We offer versions for applications such as hand tooling

and large machine tooling, as well as for specific industries such as stone, tile, hardscape and construction.

To request these catalogs, or for more information about our product line, visit our website at www.alpha-tools.com or contact us at 800-648-7229.





ALPHA® T @OL REPAIR

- Authorized repair centers available
- All tool repairs carry a 30-day warranty
- Quick turn-around time
- Technical support for repair and maintenance
- Order replacement tool parts directly from Alpha®
- Loaner program available

Visit our website to find a local center



Let's get social...











We are ready to connect with you on your favorite social media sites... Join Us Today!



Alpha Professional Tools[®]

16 Park Dr Ste 9 • Franklin, NJ 07416 800-648-7229



www.alpha-tools.com