



PUMP-OUT VACUUM

**High-Performance
Pump-Out Vacuum for
fast, high-volume pick-up
of spills, flood water and
concrete slurries**



PUMP

Water is sucked in through the suction hose. The integrated dirty water pump immediately pumps the collected water through C-pipe connection at the rear of the device.



FEATURES

- **Fast And Reliable Water Extraction**
- **Durable Plastic Construction**
- **Easy-To-Maintain Exhaust Filter**
- **Universal C-Coupling Connection**
- **Efficient Drainage System**
- **Sturdy Locking Brakes**
- **Well Balanced Suction And Pump Performance**

SPECIFICATIONS:

Model:PUMPW010
Function: Pump-Out Vacuum
Voltage: 120V / 60Hz
Watt: 1750W
Power Consumption (Device): 1200W
Power Consumption (Pump): 550W
Waterlift: 92.4in
Airflow: 157CFM
Max. Flow Rate (Pump): 75GPM
Max. Suction Height: 6.5ft
Max. Delivery Head (Pump): 29.5ft
Container Material: Plastic
Container Capacity: 10.6gal
Length Of Vacuum Hose: 23ft
Length Of Discharge Hose: 32.8ft
Diameter Of Hose: 1-1/2in
Diameter Of Tubes: 1-1/2in
Length Of Power Cord: 32.8ft
Weight: 48.5lb
Dimensions (HxLxW): 28-1/4 x 21-1/4 x 15-1/4

EQUIPMENT INCLUDED:

- C-Hose, Pump Side, 10m (Part No. 113258)
- Suction Hose Complete 7m (Part No. 110049)
- Cyclone Insert (Part No. 113222)
- 4 X Vacuum Tubes, 50cm, Plastic (Part No. 113245)
- Crevice Nozzle (Part No. 102016)
- Wet Floor Nozzle (Part No. 109114)
- Removable Filter Basket (Part No. 112315)
- Pump 550w (Part No. 113235)

PART NO.	SIZE	DESCRIPTION
PUMPW010	10.6 Gal (40 Liters)	PUMP-OUT Vacuum

Easy-to-maintain exhaust air filter: simple to clean

Convenient cable hooks: for easy and secure transport

Universal C-coupling connection: for wastewater hose, compatible with technical relief services hoses (standard accessory)

Efficient drainage system: complete emptying of the container thanks to the bendable drainage hose

Sturdy locking brakes: prevent the vacuum cleaner from rolling away unintentionally

Space for accessories: 3 slots and dovetail guide on the rear of the device



Industrial water removal, flood recovery, and professional cleaning tasks.

Container: 10.6 Gallons

Weight: 48.5 Lbs

Power Consumption: 1200 W



Pump-Out Vacuum

1 Water is pumped in through the Vacuum hose

2 The integrated water pump draws the collected wastewater immediately through the C-tube connection and out through the backside of the Vacuum.




4,494 Gallons
Of Waste Output
Per Hour
(75 GPM)

Maximum Conveyor Lengths



Maximum Delivery Head

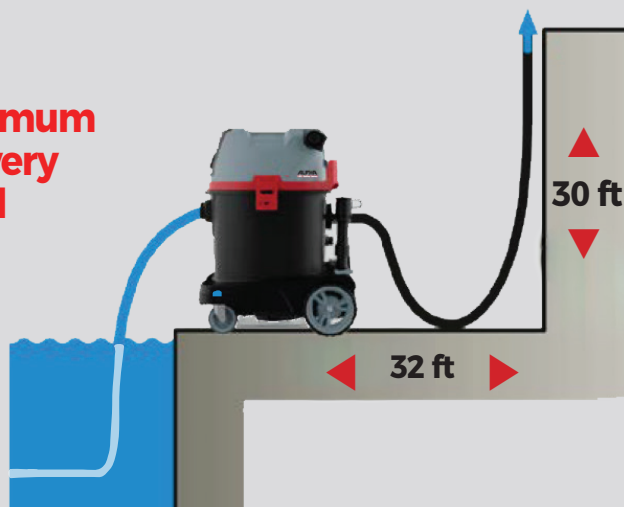

 **Alpha Professional Tools®**

16 Park Dr Ste 9, Franklin, NJ 07416 • 800-648-7229
www.alpha-tools.com