

Beveling Base System

**GRIND A
MITER EDGE
WITH
PRECISION**



BEFORE



AFTER

**SURFACE
PREPARATION
FOR
SEAMLESS
COUNTERTOP
INSTALLATIONS**

----- **SAME EDGE** -----

**POLISH
STRAIGHT AND
BEVEL EDGE TO
A FACTORY
FINISH**



Alpha® Beveling System Overview

Beveling Auxiliary Base



- Transforms Any Polisher or Variable Speed Grinder Into a Precision Straight and Beveled Edge Polishing Tool
- Grind and Polish from 15 degree Hollywood Bevel to 45 degree Beveled Edge or Straight Edge

Model:	BAB1590 / BAB1590-M14
Beveling Angle:	15°~45°
Beveling Depth:	3/8" (10mm)
Max. Straight Angle:	90°
Max. Pad Size:	4" (100mm)
Spindle:	5/8"-11 / M14-2
Weight:	3.57 lbs (1.62 kgs)

PART NO.	TYPE
BAB1590	Beveling Auxiliary Base 5/8"-11
BAB1590-M14	Beveling Auxiliary Base M14-2
BAB0650	Surface Protection Tape 6" x 164'

Guide Rail System & Carriage Assembly



- Guide Rails are High-Quality Straight Edges Constructed of Sturdy Cast Aluminum
- Perform Cuts That Are Straight and True, Time After Time
- Works Great When Used with A Carriage Assembly



BAB-CASM
Carriage Assembly for Beveling Base

PART NO.	SIZE	DESCRIPTION
ASC-GR04	4' (1.2m)	Guide Rail with 2 Clamps
ASC-GR07	7' (2.1m)	Guide Rail with 2 Clamps
ASC-GR012	12' (3.6m)	Guide Rail (2-6' pcs) with 2 Clamps, Connector & 4 Screws
ASC-GRKIT	Set	Guide Rail Bundle (3 Rails (4', 7', 12'), 6 Clamps, Connector & 4 Screws)
GR-AGCT	12" (0.3m)	Guide Rail Connector w/4 Screws (M8x20) for 12' Rails
BAB-CASM	BAB1590	Carriage Assembly for Beveling Base

Repositionable Waterproof Surface Protection Tape



- Protects Surfaces from Scratches, Stains and Etching
- Applicable for All Stone Faces Including Marble and Limestone
- Can Be Used for Wet and Dry applications
- Easily Mark Tape with Ball Point Pen, Permanent Marker, China Marker, etc.

PART NO.	COLOR	SIZE	RECOMMENDED FOR
BAB0650	Black	6" x 164'	Large Surface Protection

Turboshine Grinding, Polishing and Scratch Removal Systems



Turboshine Grinding Tools

3" Rigid Grinding Wheel


- Grind Mitered Edge with Precision
- Grind Hollywood Bevel with Ease
- Recommended for all Hard Surfaces



PART NO.	MAX. RPM	THREADS	GRIT	COLOR
TSM30060M/TSM306014	14,500	5/8"-11/M14-2	60	Blue
TSM30120M/TSM312014	14,500	5/8"-11/M14-2	120	Yellow

Turboshine Polishing Tools

Polishing Wheel For Natural and Engineered Stone

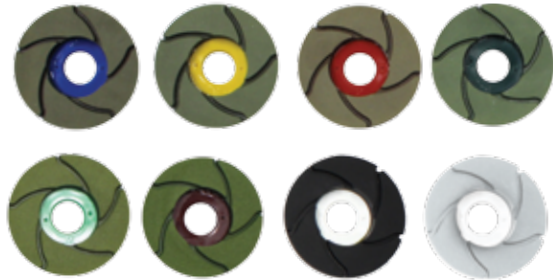

- Designed for Polishing Seamless Countertops and Scratch Removal for Natural and Engineered Stones
- Utilizes Dual Adapter System for Reduced Vibration
- Comes in 3" Rigid Discs



PART NO.	MAX. RPM	THREADS	GRIT	COLOR
TSR30100R	4,000	Dual Adapter System	100	Blue
TSR30200R	4,000	Dual Adapter System	200	Yellow
TSR30500R	4,000	Dual Adapter System	500	Red
TSR31000R	4,000	Dual Adapter System	1000	Dark Green
TSR32000R	4,000	Dual Adapter System	2000	Light Green
TSR33000R	4,000	Dual Adapter System	3000	Brown
TSR3BLACK	4,000	Dual Adapter System	Buff	Black
TSR3WHITE	4,000	Dual Adapter System	Buff	White
DAS35/8PD	6,000	5/8"-11		Adapter
DAS3M14PD	6,000	M14-2		Adapter



Dual Adapter

Turboshine Polishing Wheel For Crystallized Glass and Sintered Slab



- Great for Polishing Seamless Countertops and Scratch Removal On Pure White Crystallized Glass and Sintered Slabs
- Utilizes Dual Adapter System for Reduced Vibration
- Comes in 3" Flexible Discs



PART NO.	MAX. RPM	THREADS	GRIT	COLOR
TSG30200R	4,000	Dual Adapter System	200	Yellow
TSG30500R	4,000	Dual Adapter System	500	Red
TSG31000R	4,000	Dual Adapter System	1000	Dark Green
TSG32000R	4,000	Dual Adapter System	2000	Light Green
TSG3TSUYA	4,000	Dual Adapter System	Tsuya Final Polish	Black
DAS35/8PD	6,000	5/8"-11 Adapter		Adapter
DAS3M14PD	6,000	M14-2		Adapter



Dual Adapter

Groove Cutter

Wet Groove Cutting Wheel for Joint Seaming



- Perfect for Natural & Engineered Stones and Sintered Slabs
- Create Strongest Joint Seam
- Consistent Performance with Ease of Operation

PART NO.	THICKNESS	MAX RPM	THREADS	RECOMMENDED FOR	FOR USE ON
GCW258	4.2mm	14,500	5/8"-11/M14-2	3/4" Slab	Granite/Quartz
GCW358	7.5mm	14,500	5/8"-11/M14-2	1-1/4" Slab	Granite/Quartz
MCW258	4.6mm	14,500	5/8"-11/M14-2	3/4" Slab	Marble/Sintered Slabs
PFBNG01	Nylon Guide				

ELECTRIC POLISHER

VSP-320/VSP-340 Variable Speed Electric Wet Polisher



- Heavy-Duty Gear System with Step-Down Transmission
- EasyOn-EasyOff Sleeve Improves Maneuverability
- Center Water-Feed System
- Ventilation Cap Diverts Water from Getting Into Motor Housing



Model:	VSP-320/VSP-340
Rating:	120V/230V
Amperage:	7.0A/3.5A
Power:	800W
No Load Speed (Variable):	700-2500 RPM
Weight:	7.3 lbs (3.3 kgs)
Spindle:	5/8"-11/M14-2
Power Supply:	Single-phase AC, 50/60Hz
Plug Type:	A (120V) C(230V)
Cord:	15ft (4.5m)
Polishing Disc Size	4" (100mm)

PART NO.	DESCRIPTION	THREADS
VSP-320	Variable Speed Wet Polisher (120V)	5/8"-11
VSP-340	Variable Speed Wet Polisher (230V)	M14-2

Equipment included

Ground Fault Circuit Interrupter*, Flexible Hose w/ Garden Hose Adapter*, Wrench, C-Handle w/ Mounting Screws*, Side Handle (reversible), Extra Carbon Brush Set, Ventilation Cap w/Rubber Band*, Splash Guard w/Clamp, EasyOn-EasyOff Sleeve*
*Factory Attached

PNEUMATIC POLISHER

AIR-680/AIR-684 Pneumatic Polisher



- High-Performance, Pneumatic Polishing Tool with A Central Water-Feed System
- 15ft. All-Weather Hoses with Flexibility Down To -40F (or +140F)
- Oil Port for Easy Lubrication
- Lightweight and Ergonomically Designed
- Consumes 15 CFM (420l/min) and Requires 85 PSI (6 Bars)

Model:	AIR-680/AIR-684
Air Pressure:	85 PSI/6 Bars
Air Consumption:	15 CFM/ 420 l/min
No Load Speed:	4,000 RPM
Weight:	2.64 lbs/1.2 kgs
Air Inlet:	1/4" BSPP
Water Inlet:	1/8" BSPP
Spindle:	5/8"-11/M14-2

PART NO.	DESCRIPTION	THREADS
AIR-680	Pneumatic Polisher	5/8"-11
AIR-684	Pneumatic Polisher	M14-2
AIR-008	Rust Inhibitor Oil 8oz (237ml)	

Equipment included

Air Hose (15ft / 4.5m), Water Hose (15ft / 4.5m), Side Handle (reversible), Double End Wrench (19mm / 22mm), Rust Inhibitor Oil (8oz / 237ml) (AIR-008) Screw (w/ O-Ring Seal for Oil Port), Exhaust Hose with Clamp



RUST INHIBITOR OIL



103 Bauer Drive • Oakland, NJ 07436
800-648-7229 • Fax: 800-286-0114

www.alpha-tools.com

Copyright © 2019 Alpha Professional Tools. All rights reserved.

FL2264-4/19